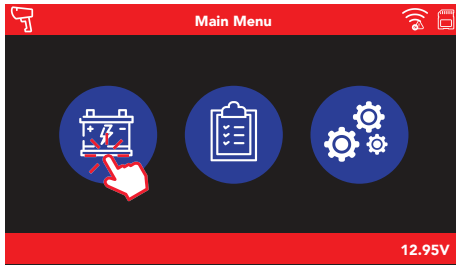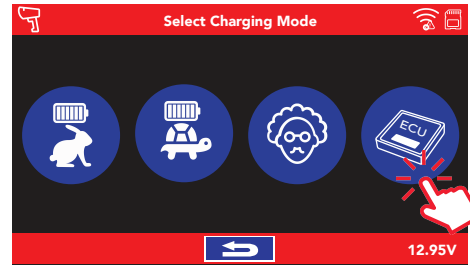# E-XTEQ
# BC1012 ECU REFLASH QUICKGUIDE

## 1  MAIN MENU

The Main Menu has three icons. Charge, History and Settings.
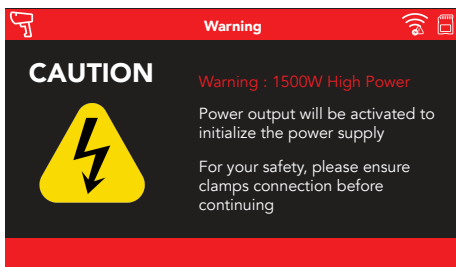Select the Charge Icon to Proceed.
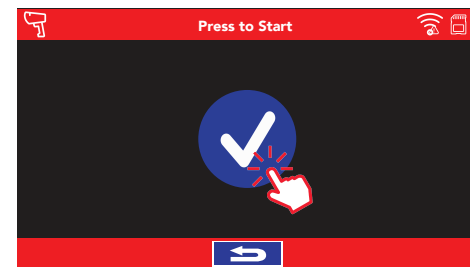


## 2  SELECT CHARGING MODE

Select ECU Reflash Mode.
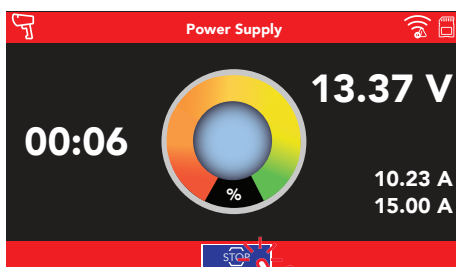


## 3  WARNING

Warning screen displays before test starts.



**CAUTION**

Warning : 1500W High Power

Power output will be activated to initialize the power supply

For your safety, please ensure clamps connection before continuing

## 4  PRESS TO START

Click "✓" to to start test.



## 5  POWER SUPPLY

Power supply mode in charge.
To stop the charge, press the stop button.



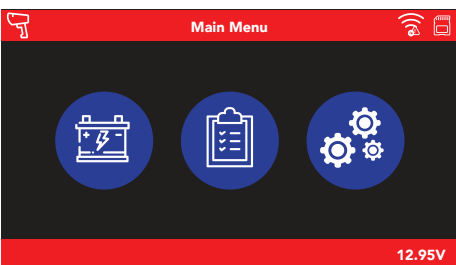00:06    13.37 V

10.23 A
15.00 A

## 6  STOP CHARGING

Click "✓" to confirm the stop,
Click "X" to go back to charging.
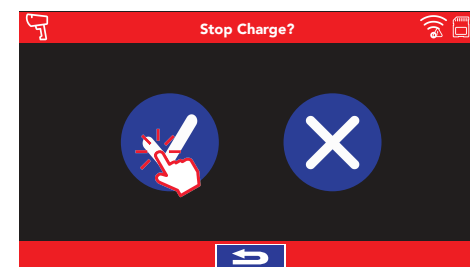


## 7  MAIN MENU

After stopping charge, it will go back to the Main Menu.



## CONTACT US

TECH SUPPORT - USA
1-877-453-3265 English
support.usa@e-xteq.com

HOURS OF OPERATION (EST)
Monday - Friday: 8 am - 8 pm

Comprehensive support also available
through www.e-xteq.com