



# DCBS USER MANUAL

MANUEL / Reference : MAN\_DCBS\_E-XTEQ\_EN\_V1.0



E-XTEQ provides International engineering / OEM's worldwide connections / High capacity production.  
**HIGH-TECH INDUSTRIES: RESEARCH & DEVELOPMENT, ASSEMBLY LINES, WORKSHOPS**

 E-XTEQ USA T.: (877) 453 3265 | E-XTEQ EUROPE T.: +33 01 30 07 13 30 | [E-XTEQ.COM](http://E-XTEQ.COM)

**E-XTEQ**  
Measurement Global Solutions



**Table of Content**

**Introduction**

**Safety Guidelines**

- Maintenance and Storage
- Before Use
- Usage Precautions
- Disassembly/Damage/Removal
- Cleaning the Product

**Getting Started**

- Safety Reminders
- Appearance and Dimensions
- Trolley LED's
- Remote Presentation
- Remote Job Storage

**Accessories**

**Initial Setup**

- Installation
- Battery Cable Clamps Connection
- Power Cable Connection and Power On
- Dealer Id. N°
- Wi-Fi Connection (Remote to Trolley)
- Physical Connection (Remote to Trolley)
- Update

**Settings**

- Preferences
- Wi-Fi Connection (Remote to network)
- Other Settings

**Diagnostic and Charge**

- Remote handheld diagnostic tester
  - Manual Selection of Battery
  - Start Diagnostic & Results
  - Results (remote CCA test)
- Trolley Diagnostic
  - Pre Delivery Inspection Test (PDI) & Results
  - Complete Diagnostic & Results
  - Charge & Results
  - Load Test & Results
  - Reserve Capacity Test & Results

**History (Results Storage)**

**Optimus**

- Optimus Installation
- Using Optimus

**Support Information**

- Batteries
- Error Messages

**Warranty**

# Table of Contents

E-XTEQ DCBS USER MANUAL	
<b>Introduction</b> .....	<b>3</b>
<b>Safety Guidelines</b> .....	<b>4</b>
Maintenance and Storage.....	4
Before Use .....	4
Usage Precautions.....	5
Disassembly/Damage/Removal.....	5
Cleaning the Product .....	5
<b>Getting Started</b> .....	<b>6</b>
Safety Reminders .....	6
Appearance and Dimensions.....	6
Trolley LED's .....	7
Remote Presentation.....	7
Remote Job Storage .....	8
Accessories .....	8
<b>Initial Setup</b> .....	<b>10</b>
Installation .....	10
Battery Cable Clamps Connection.....	11
Power Cable Connection and Power On .....	11
Wi-Fi Connection (Remote to Trolley Only) .....	12
Dealer Identification Number (Business Associate Code) .....	13
Update .....	13
<b>Settings</b> .....	<b>17</b>
Preferences .....	17
Wi-Fi Connection (Remote to net) .....	18
Other settings .....	19
<b>Diagnostic and Charge</b> .....	<b>20</b>
<b>Remote handheld diagnostic tester</b> .....	<b>20</b>
-Vehicle Selection from Database .....	20
-Manual Selection of Battery .....	23
-Start Diagnostic & Results .....	24
<b>Trolley Diagnostic</b> .....	<b>26</b>
-Complete Diagnostic & Results .....	26
-Charge & Results.....	29
-Load Test & Results.....	32
-Reserve Capacity Test & Results.....	35
<b>Result storage</b> .....	<b>38</b>
<b>Optimus</b> .....	<b>40</b>
-Optimus installation.....	40
-Using Optimus .....	43
<b>Support Information</b> .....	<b>45</b>
<b>Warranty</b> .....	<b>47</b>

## Revision of the manual

Due to software updates, your experience of the software interface (including but not limited to software features, user interfaces, and interaction experiences) may differ from the interface presented in this manual. The software interface is subject to change.

ÉDITION / REVISION	REFERENCE	DATE	UPDATES PARTS
First edition	MAN_DCBS_E-XTEQ_EN_V1.0	September 2022	-



## Table of Content

### Introduction

#### Safety Guidelines

Maintenance and Storage  
 Before Use  
 Usage Precautions  
 Disassembly/Damage/Removal  
 Cleaning the Product

#### Getting Started

Safety Reminders  
 Appearance and Dimensions  
 Trolley LED's  
 Remote Presentation  
 Remote Job Storage  
 Accessories

#### Initial Setup

Installation  
 Battery Cable Clamps Connection  
 Power Cable Connection and Power On  
 Dealer Id. N°  
 Wi-Fi Connection (Remote to Trolley)  
 Physical Connection (Remote to Trolley)  
 Update

#### Settings

Preferences  
 Wi-Fi Connection (Remote to network)  
 Other Settings

#### Diagnostic and Charge

Remote handheld diagnostic tester  
 -Manual Selection of Battery  
 -Start Diagnostic & Results  
 -Results (remote CCA test)  
 Trolley Diagnostic  
 -Pre Delivery Inspection Test (PDI) & Results  
 -Complete Diagnostic & Results  
 -Charge & Results  
 -Load Test & Results  
 -Reserve Capacity Test & Results

#### History (Results Storage)

#### Optimus

-Optimus Installation  
 -Using Optimus

#### Support Information

Batteries  
 Error Messages

#### Warranty

# Introduction

## ABOUT //////////////

E-XTEQ is a battery diagnostic tool and equipment manufacturer with a broad spectrum of knowledge and understanding of battery technology for Industrial, OE and Aftermarket Maintenance including EV/HEV applications.

Our mission is to be a passionate global leader of innovative measurement solutions by providing premium testing equipment and unsurpassed services to our valued customers and partners.

The DCBS supports battery diagnostic tests including functional true ½ CCA load test and **provides a true reserve capacity test**. DCBS has built-in 12V/100A battery charger/maintainer that provides in-depth features and functions to stabilize battery voltage during ECU re-flashing and is capable of charging different chemistry batteries.

The remote is a comprehensive battery analyzer with intuitive features and functions that promotes user friendliness, speed, accuracy and intelligence, enabling technicians to manage diagnostics through every step of the process from start to finish and can be used simultaneously.





## Table of Content

### Introduction

#### Safety Guidelines

#### Maintenance and Storage

#### Before Use

Usage Precautions

Disassembly/Damage/Removal

Cleaning the Product

#### Getting Started

Safety Reminders

Appearance and Dimensions

Trolley LED's

Remote Presentation

Remote Job Storage

Accessories

#### Initial Setup

Installation

Battery Cable Clamps Connection

Power Cable Connection and Power On

Dealer Id. N°

Wi-Fi Connection (Remote to Trolley)

Physical Connection (Remote to Trolley)

Update

#### Settings

Preferences

Wi-Fi Connection (Remote to network)

Other Settings

#### Diagnostic and Charge

Remote handheld diagnostic tester

-Manual Selection of Battery

-Start Diagnostic & Results

-Results (remote CCA test)

Trolley Diagnostic

-Pre Delivery Inspection Test (PDI) & Results

-Complete Diagnostic & Results

-Charge & Results

-Load Test & Results

-Reserve Capacity Test & Results

#### History (Results Storage)

#### Optimus

-Optimus Installation

-Using Optimus

#### Support Information

Batteries

Error Messages

#### Warranty

# Safety Guidelines 1/2

## Please read the safety guidelines carefully.

This section indicates the areas that need to be protected in order to prevent harm to people who use this equipment, damage to property and to enable proper use of this product.

### MAINTENANCE AND STORAGE //////////////

Keep this product dry. Do not expose the DCBS to rain or snow.

Discontinue use and contact technical support if an overheat event has occurred, or if corrosion or deterioration has been identified in the cables or other parts of the product.

### BEFORE USE //////////////



Keep the exterior clean and free of dust.  
Do not disassemble or modify the main unit as it may cause an electrical shortage or fire.  
To reduce the risk of electrical shortage, unplug the AC power plug before cleaning and maintenance.

**Extreme caution: Keep liquids and conductive tools away from the DCBS while operating.**

DCBS must be used in a well-ventilated area.

When operating the equipment make sure the surface is dry and clean to minimize any risks.



The battery contains chemicals that may generate explosive gases. Before handling the battery, remove all metal accessories such as rings, bracelets and necklaces. Short circuit at battery terminals may cause burns. Do not place batteries near flames or other heat sources.



The battery fluid is highly corrosive. If the battery fluid gets on your skin or clothes, immediately wash it with soap and water. If electrolyte gets in your eyes, immediately flush with cold water for at least 10 minutes and seek medical attention.



**Table of Content**

**Introduction**

**Safety Guidelines**

Maintenance and Storage

Before Use

Usage Precautions

Disassembly/Damage/Removal

Cleaning the Product

**Getting Started**

Safety Reminders

Appearance and Dimensions

Trolley LED's

Remote Presentation

Remote Job Storage

Accessories

**Initial Setup**

Installation

Battery Cable Clamps Connection

Power Cable Connection and Power On

Dealer Id. N°

Wi-Fi Connection (Remote to Trolley)

Physical Connection (Remote to Trolley)

Update

**Settings**

Preferences

Wi-Fi Connection (Remote to network)

Other Settings

**Diagnostic and Charge**

Remote handheld diagnostic tester

-Manual Selection of Battery

-Start Diagnostic & Results

-Results (remote CCA test)

Trolley Diagnostic

-Pre Delivery Inspection Test (PDI) & Results

-Complete Diagnostic & Results

-Charge & Results

-Load Test & Results

-Reserve Capacity Test & Results

**History (Results Storage)**

**Optimus**

-Optimus Installation

-Using Optimus

**Support Information**

Batteries

Error Messages

**Warranty**

# Safety Guidelines 2/2

## USAGE PRECAUTIONS //////////////

Do not use extension cords as there is a risk of fire and electrical shortage.

If use is necessary, check that the extension cord has the following:

1. Identical plug, cable size and the same electrical wiring as the DCBS.
2. Make sure the equipment is securely connected before use.

When unplugging the cord from the outlet, hold the frame of the plug to avoid damaging the plug or power cord. Pulling the cord may cause the cable plug to break. Replace power cord immediately if damaged.

If the outlet shape does not fit the plug, please contact the E-XTEQ service department.

Phone: [1.877.453.3265](tel:1.877.453.3265)

E-mail: [support.usa@e-xteq.com](mailto:support.usa@e-xteq.com)



*Do not touch the power connector during use. Keep away and Do Not Touch restricted areas of this equipment.*

## DISASSEMBLY/DAMAGE/REMOVAL //////////////

Do not disassemble the product or damage or remove the stickers or labels on the product. If the product's case has been disassembled or damaged by the user, all warranties will be void. Always contact a designated E-XTEQ Service Center for repairs.

Do not insert metallic objects into the unit to prevent electric shock, fire, short circuit, possible leaking of harmful substances and personal injuries. Do not store the product in a wet or humid place. Always store the product in a dry place.

## CLEANING THE PRODUCT //////////////

It is recommended that you clean the product by wiping it gently using a soft cloth. Do not use water, chemical substances or detergents. They may cause discoloration or corrosion to the product's exterior and may cause a fire or electric shock.



**Table of Content**

**Introduction**

**Safety Guidelines**

- Maintenance and Storage
- Before Use
- Usage Precautions
- Disassembly/Damage/Removal
- Cleaning the Product

**Getting Started**

**Safety Reminders**

**Appearance and Dimensions**

- Trolley LED's
  - Remote Presentation
  - Remote Job Storage
  - Accessories
- Initial Setup**
- Installation
  - Battery Cable Clamps Connection
  - Power Cable Connection and Power On
  - Dealer Id. N°
  - Wi-Fi Connection (Remote to Trolley)
  - Physical Connection (Remote to Trolley)
  - Update

**Settings**

- Preferences
- Wi-Fi Connection (Remote to network)
- Other Settings

**Diagnostic and Charge**

- Remote handheld diagnostic tester
  - Manual Selection of Battery
  - Start Diagnostic & Results
  - Results (remote CCA test)
- Trolley Diagnostic
  - Pre Delivery Inspection Test (PDI) & Results
  - Complete Diagnostic & Results
  - Charge & Results
  - Load Test & Results
  - Reserve Capacity Test & Results

**History (Results Storage)**

**Optimus**

- Optimus Installation
- Using Optimus

**Support Information**

- Batteries
- Error Messages

**Warranty**

# Getting Started 1/4

## SAFETY REMINDERS //////////////

Please review the safety guidelines in this manual before using the DCBS for safety operations

When unplugging the DCBS, pull on the plug frame rather than the cord to reduce the risk of damaging the power plug or cord.

The DCBS is designed for indoor use. Use outside in dry weather only.

The GM DCBS enables a wide range diagnostic procedures with 0-15V/0-80A (100A Optional) charge capability.


## APPEARANCE AND DIMENSIONS //////////////

**Dimension Details:**

Metrics: 1300 x 580 x 690 (mm)  
Imperial: 51.18 x 22.83 x 27.16 (inch)

**Weight:**

Kilogram: 67 (kg)  
Pounds: 148 (lbs.)

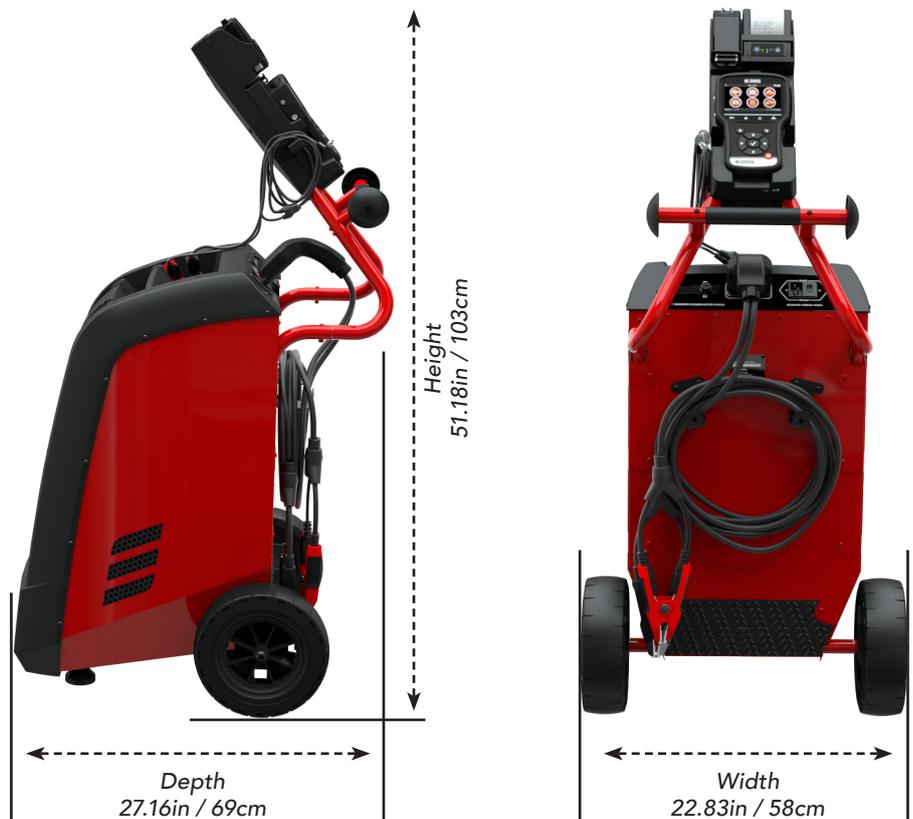



**Table of Content**

**Introduction**

**Safety Guidelines**

- Maintenance and Storage
- Before Use
- Usage Precautions
- Disassembly/Damage/Removal
- Cleaning the Product

**Getting Started**

- Safety Reminders
- Appearance and Dimensions

**Trolley LED's**

**Remote Presentation**

**Remote Job Storage**

**Accessories**

**Initial Setup**

- Installation
- Battery Cable Clamps Connection
- Power Cable Connection and Power On Dealer Id. N°
- Wi-Fi Connection (Remote to Trolley)
- Physical Connection (Remote to Trolley)
- Update

**Settings**

- Preferences
- Wi-Fi Connection (Remote to network)
- Other Settings

**Diagnostic and Charge**

- Remote handheld diagnostic tester
  - Manual Selection of Battery
  - Start Diagnostic & Results
  - Results (remote CCA test)
- Trolley Diagnostic
  - Pre Delivery Inspection Test (PDI) & Results
  - Complete Diagnostic & Results
  - Charge & Results
  - Load Test & Results
  - Reserve Capacity Test & Results

**History (Results Storage)**

**Optimus**

- Optimus Installation
- Using Optimus

**Support Information**

- Batteries
- Error Messages

**Warranty**

# Getting Started 2/4

## TROLLEY LED'S //////////////



**1. Charge** – The Charge LED will blink during diagnostic and charge operations.

**2. Wi-Fi Connection (Remote to Trolley only)** – The Wi-Fi connection LED will turn GREEN once connection is established or turn RED if connection is lost.

**3. Status** – If the Status LED is RED, the trolley has encountered an error.

**4. Load Test** – The Load Test LED will blink BLUE during a Load Test and a Reserve Capacity Test.

## REMOTE PRESENTATION //////////////



- 1 IR Thermometer
- 2 Connection to Trolley
- 3 Remote Battery Status
- 4 Remote Clamps Connection Port
- 5 Remote Connection Voltage Display
- 6 Trolley Connection Voltage Display
- 7 Diagnostic/Charge Indicator
- 8 Trolley Connection Indicator
- 9 Error Mode Indicator
- 10 Load Test Indicator
- 11 Start Test
- 12 Cancel, Previous Step
- 13 OK, Next Step
- 14 Navigation Arrows
- 15 Power On/Off
- 16 Ethernet Port for Physical Connection



**Table of Content**

**Introduction**

**Safety Guidelines**

- Maintenance and Storage
- Before Use
- Usage Precautions
- Disassembly/Damage/Removal
- Cleaning the Product

**Getting Started**

- Safety Reminders
- Appearance and Dimensions
- Trolley LED's
- Remote Presentation

**Remote Job Storage**

**Accessories**

**Initial Setup**

- Installation
- Battery Cable Clamps Connection
- Power Cable Connection and Power On Dealer Id. N°
- Wi-Fi Connection (Remote to Trolley)
- Physical Connection (Remote to Trolley)
- Update

**Settings**

- Preferences
- Wi-Fi Connection (Remote to network)
- Other Settings

**Diagnostic and Charge**

- Remote handheld diagnostic tester
  - Manual Selection of Battery
  - Start Diagnostic & Results
  - Results (remote CCA test)
- Trolley Diagnostic
  - Pre Delivery Inspection Test (PDI) & Results
  - Complete Diagnostic & Results
  - Charge & Results
  - Load Test & Results
  - Reserve Capacity Test & Results

**History (Results Storage)**

**Optimus**

- Optimus Installation
- Using Optimus

**Support Information**

- Batteries
- Error Messages

**Warranty**

# Getting Started 3/4

## REMOTE JOB STORAGE //////////////

The remote has expandable storage through an SD card located on the right side of the tool inside the rubber protective boot.

The tool will come with a 16 GB removable SD card.


Acceptable sizes for replacements are 4GB, 8GB and 16GB formatted with FAT32 file system.

## ACCESSORIES //////////////

### Power Cord

16.4 ft/5m power cord is supplied with the GM DCBS.

*\*The cord will be suitable based on the destination country standards\**

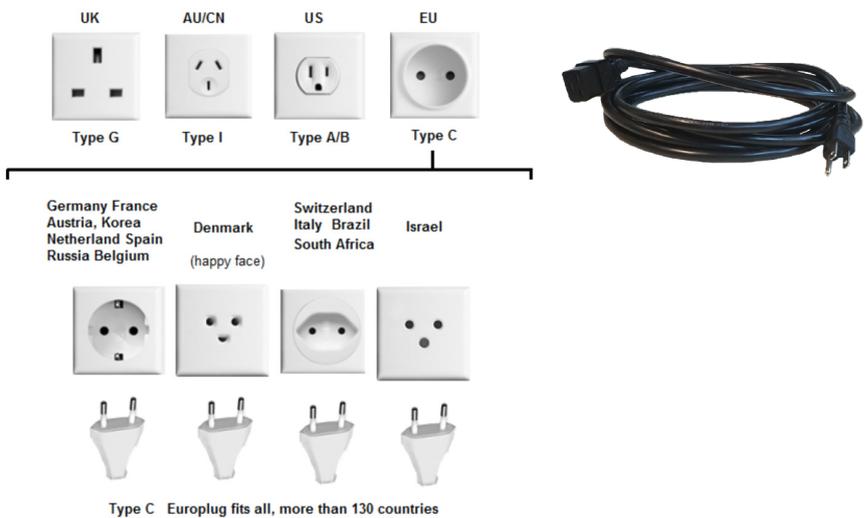

### Charge Cable with Clamp



The cable will be used for trolley diagnostic and charging.



**Table of Content**

**Introduction**

**Safety Guidelines**

- Maintenance and Storage
- Before Use
- Usage Precautions
- Disassembly/Damage/Removal
- Cleaning the Product

**Getting Started**

- Safety Reminders
- Appearance and Dimensions
- Trolley LED's
- Remote Presentation
- Remote Job Storage

**Accessories**

**Initial Setup**

- Installation
- Battery Cable Clamps Connection
- Power Cable Connection and Power On Dealer Id. N°
- Wi-Fi Connection (Remote to Trolley)
- Physical Connection (Remote to Trolley)
- Update

**Settings**

- Preferences
- Wi-Fi Connection (Remote to network)
- Other Settings

**Diagnostic and Charge**

- Remote handheld diagnostic tester
  - Manual Selection of Battery
  - Start Diagnostic & Results
  - Results (remote CCA test)
- Trolley Diagnostic
  - Pre Delivery Inspection Test (PDI) & Results
  - Complete Diagnostic & Results
  - Charge & Results
  - Load Test & Results
  - Reserve Capacity Test & Results

**History (Results Storage)**

**Optimus**

- Optimus Installation
- Using Optimus

**Support Information**

- Batteries
- Error Messages

**Warranty**

# Getting Started 4/4

## ACCESSORIES // // // // //

### Docking Station with Printer



### Accessories Box

- 8 Short Screws
- 2 Long Screws
- Printer Paper Roll
- 1.5mm Specific Remote Clamps
- 2 Hooks (For Restart of the Trolley)
- 1 Hook (Docking Station)
- USB Cable
- Ethernet Cable (For Physical Connection)





**Table of Content**

**Introduction**

**Safety Guidelines**

- Maintenance and Storage
- Before Use
- Usage Precautions
- Disassembly/Damage/Removal
- Cleaning the Product

**Getting Started**

- Safety Reminders
- Appearance and Dimensions
- Trolley LED's
- Remote Presentation
- Remote Job Storage
- Accessories

**Initial Setup**

**Installation**

- Battery Cable Clamps Connection
- Power Cable Connection and Power On Dealer Id. N°
- Wi-Fi Connection (Remote to Trolley)
- Physical Connection (Remote to Trolley)
- Update

**Settings**

- Preferences
- Wi-Fi Connection (Remote to network)
- Other Settings

**Diagnostic and Charge**

- Remote handheld diagnostic tester
  - Manual Selection of Battery
  - Start Diagnostic & Results
  - Results (remote CCA test)
- Trolley Diagnostic
  - Pre Delivery Inspection Test (PDI) & Results
  - Complete Diagnostic & Results
  - Charge & Results
  - Load Test & Results
  - Reserve Capacity Test & Results

**History (Results Storage)**

**Optimus**

- Optimus Installation
- Using Optimus

**Support Information**

- Batteries
- Error Messages

**Warranty**

# Initial Setup 1/8

## INSTALLATION //////////

The unit needs to be placed in a clean, dry and ventilated area.

Tools necessary to assemble trolley:

- 4mm Allen Wrench, 10mm Socket/Wrench. (Step 3, use long screws)
- 3mm Allen Wrench. (Step 4, use short screw)

Once the unit is out of the box, the next step is to connect the docking station to the trolley.

Then install the remote clamps hook and install the printer and the paper.

To use the remote by itself, connect the clamps on the side of the remote.



**Caution:** Insert screw carefully in step 3 to not damage cable with screw inside tube.



**Table of Content**

**Introduction**

**Safety Guidelines**

- Maintenance and Storage
- Before Use
- Usage Precautions
- Disassembly/Damage/Removal
- Cleaning the Product

**Getting Started**

- Safety Reminders
- Appearance and Dimensions
- Trolley LED's
- Remote Presentation
- Remote Job Storage

**Accessories**

**Initial Setup**

- Installation
- Battery Cable Clamps Connection**
- Power Cable Connection and Power On**
- Dealer Id. N°
- Wi-Fi Connection (Remote to Trolley)
- Physical Connection (Remote to Trolley)
- Update

**Settings**

- Preferences
- Wi-Fi Connection (Remote to network)
- Other Settings

**Diagnostic and Charge**

- Remote handheld diagnostic tester
  - Manual Selection of Battery
  - Start Diagnostic & Results
  - Results (remote CCA test)
- Trolley Diagnostic
  - Pre Delivery Inspection Test (PDI) & Results
  - Complete Diagnostic & Results
  - Charge & Results
  - Load Test & Results
  - Reserve Capacity Test & Results

**History (Results Storage)**

**Optimus**

- Optimus Installation
- Using Optimus

**Support Information**

- Batteries
- Error Messages

**Warranty**

# Initial Setup 2/8

## BATTERY CABLE CLAMPS CONNECTION //////////////

Remove the battery cable clamps from the box to connect them through the connector in the rear of the DCBS Trolley.



## POWER CABLE CONNECTION AND POWER ON //////////////

Input power information

<b>Voltage</b>	100 – 240 V
<b>Frequency</b>	50/60 Hz
<b>Consumption</b>	2 kW Maximum

Connect the power cord to the connector located on the back of the DCBS, then connect the opposite plug to a standard electrical socket. Switch on the device by setting the switch to the "I" position.





**Table of Content**

**Introduction**

**Safety Guidelines**

- Maintenance and Storage
- Before Use
- Usage Precautions
- Disassembly/Damage/Removal
- Cleaning the Product

**Getting Started**

- Safety Reminders
- Appearance and Dimensions
- Trolley LED's
- Remote Presentation
- Remote Job Storage
- Accessories

**Initial Setup**

- Installation
- Battery Cable Clamps Connection
- Power Cable Connection and Power On Dealer Id. N°
- Wi-Fi Connection (Remote to Trolley)
- Physical Connection (Remote to Trolley)
- Update

**Settings**

- Preferences
- Wi-Fi Connection (Remote to network)
- Other Settings

**Diagnostic and Charge**

- Remote handheld diagnostic tester
  - Manual Selection of Battery
  - Start Diagnostic & Results
  - Results (remote CCA test)
- Trolley Diagnostic
  - Pre Delivery Inspection Test (PDI) & Results
  - Complete Diagnostic & Results
  - Charge & Results
  - Load Test & Results
  - Reserve Capacity Test & Results

**History (Results Storage)**

**Optimus**

- Optimus Installation
- Using Optimus

**Support Information**


- Batteries
- Error Messages

**Warranty**


# Initial Setup 3/8

DEALER ID NUMBER // // // // //


After trolley has been setup, turn on the remote and follow the steps below to input the Dealer ID Number into the tool. (This number is required to generate warranty code).

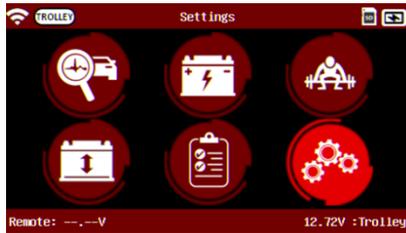


1. Go to the Settings Menu.

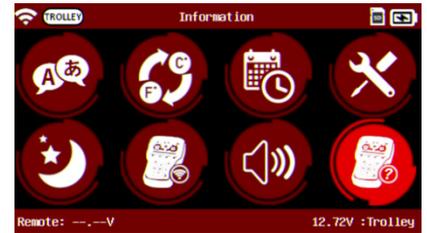

2. Go to the Information Icon.

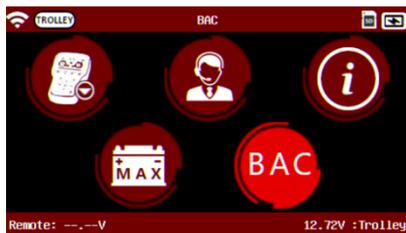

3. Go to the BAC (Business Association Code) Icon.

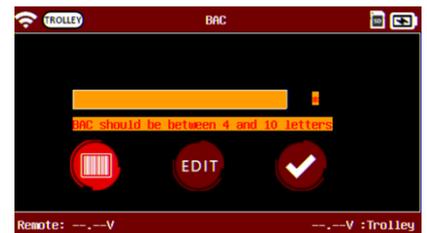

4. Input Dealer ID Number and Press Enter, then Back to Save.



Dealer ID Number will be recorded, no need to re-enter after initial setup



**Table of Content**

**Introduction**

**Safety Guidelines**

- Maintenance and Storage
- Before Use
- Usage Precautions
- Disassembly/Damage/Removal
- Cleaning the Product

**Getting Started**

- Safety Reminders
- Appearance and Dimensions
- Trolley LED's
- Remote Presentation
- Remote Job Storage

**Accessories**

**Initial Setup**

- Installation
- Battery Cable Clamps Connection
- Power Cable Connection and Power On
- Dealer Id. N°

**Wi-Fi Connection (Remote to Trolley)**

**Physical Connection (Remote to Trolley)**

**Update**

**Settings**

- Preferences
- Wi-Fi Connection (Remote to network)
- Other Settings

**Diagnostic and Charge**

- Remote handheld diagnostic tester
  - Manual Selection of Battery
  - Start Diagnostic & Results
  - Results (remote CCA test)
- Trolley Diagnostic
  - Pre Delivery Inspection Test (PDI) & Results
  - Complete Diagnostic & Results
  - Charge & Results
  - Load Test & Results
  - Reserve Capacity Test & Results

**History (Results Storage)**

**Optimus**

- Optimus Installation
- Using Optimus

**Support Information**


- Batteries
- Error Messages

**Warranty**



# Initial Setup 4/8

## WI-FI CONNECTION (REMOTE TO TROLLEY ONLY) //////////////

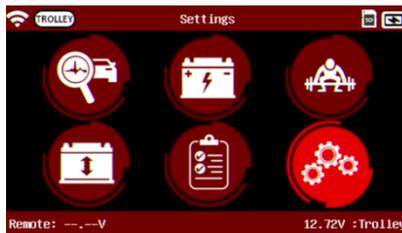

1. Turn on the Remote and go to the "Settings" icon.



2. Go to the "Wireless" icon.



3. Select "Trolley connection" Icon




4. Select your preferred Wi-Fi Frequency.



5. Select "Barcode Scan" for the tool to scan the trolley serial number or "Manual" to manually input the trolley serial number.

6. The Serial Number can be found on the back of the trolley. Refer to picture for visual confirmation.

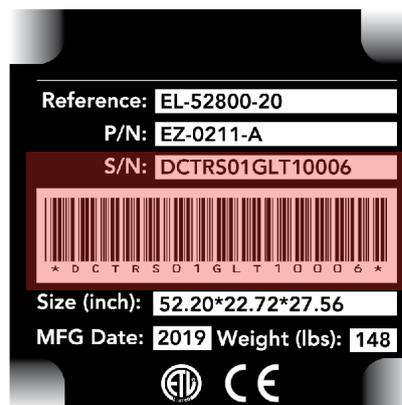

*This setting is to connect the Remote to the Trolley via Wi-Fi only. Physical connection via Ethernet cable will not work if the Wi-Fi setting is used. If the wireless connection between the Remote and Trolley is not stable due to Electromagnetic Interference, please use physical connection option explained below.*

## Table of Content

### Introduction

#### Safety Guidelines

Maintenance and Storage  
Before Use  
Usage Precautions  
Disassembly/Damage/Removal  
Cleaning the Product

#### Getting Started

Safety Reminders  
Appearance and Dimensions  
Trolley LED's  
Remote Presentation  
Remote Job Storage  
Accessories

#### Initial Setup

Installation  
Battery Cable Clamps Connection  
Power Cable Connection and Power On  
Dealer Id. N°

Wi-Fi Connection (Remote to Trolley)

Physical Connection (Remote to Trolley)

Update

#### Settings

Preferences  
Wi-Fi Connection (Remote to network)  
Other Settings

#### Diagnostic and Charge

Remote handheld diagnostic tester  
-Manual Selection of Battery  
-Start Diagnostic & Results  
-Results (remote CCA test)  
Trolley Diagnostic  
-Pre Delivery Inspection Test (PDI) & Results  
-Complete Diagnostic & Results  
-Charge & Results  
-Load Test & Results  
-Reserve Capacity Test & Results

#### History (Results Storage)

#### Optimus

-Optimus Installation  
-Using Optimus


#### Support Information

Batteries  
Error Messages

#### Warranty

# Initial Setup 5/8

## PHYSICAL CONNECTION (REMOTE TO TROLLEY ONLY) //////////////

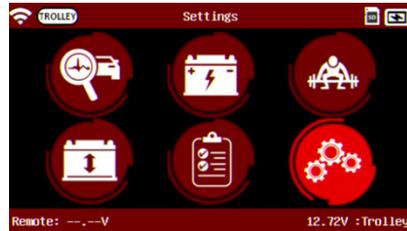

1. Turn on the Remote and go to the "Settings" icon.



3. Select the "OFF" Icon




5. Ensure the Ethernet Cable is connected to the trolley and remote as shown



2. Go to the "Wireless" icon.



4. The Wi-Fi logo will disappear from the top of the screen

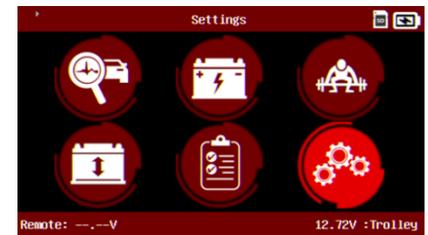

6. Verify connection by connecting a battery and confirming the voltage at bottom right



**NOTE:** If Wi-Fi is turned on, the Trolley and Remote will communicate only through the physical connection between them. Restart of Trolley and Remote may be required for proper physical connection communication.

## UPDATE //////////////

### Optimus software

DCBS is delivered with a Software Installation Guide (OPTIMUS). Optimus connection is mandatory for product update, and also useful for data (history) storage.

To install OPTIMUS on your PC you can follow the instructions of the Software Installation Guide or the indications detailed in the section "Optimus installation" of this manual.

Your recently delivered device might need an initial update.



**Table of Content**

**Introduction**

**Safety Guidelines**

- Maintenance and Storage
- Before Use
- Usage Precautions
- Disassembly/Damage/Removal
- Cleaning the Product

**Getting Started**

- Safety Reminders
- Appearance and Dimensions
- Trolley LED's
- Remote Presentation
- Remote Job Storage

**Accessories**

**Initial Setup**

- Installation
- Battery Cable Clamps Connection
- Power Cable Connection and Power On Dealer Id. N°
- Wi-Fi Connection (Remote to Trolley)
- Physical Connection (Remote to Trolley)

**Update**

**Settings**

- Preferences
- Wi-Fi Connection (Remote to network)
- Other Settings

**Diagnostic and Charge**

- Remote handheld diagnostic tester
  - Manual Selection of Battery
  - Start Diagnostic & Results
  - Results (remote CCA test)
- Trolley Diagnostic
  - Pre Delivery Inspection Test (PDI) & Results
  - Complete Diagnostic & Results
  - Charge & Results
  - Load Test & Results
  - Reserve Capacity Test & Results

**History (Results Storage)**

**Optimus**

- Optimus Installation
- Using Optimus

**Support Information**

- Batteries
- Error Messages


**Warranty**

# Initial Setup 6/8

## UPDATE //////////////

### REMOTE UPDATE


To update the remote, please connect to Optimus (see Optimus installation Quick guide). When connecting your remote to Optimus (for job download) a new software update will be proposed if available.




The following message will then appear.



On OPTIMUS software:

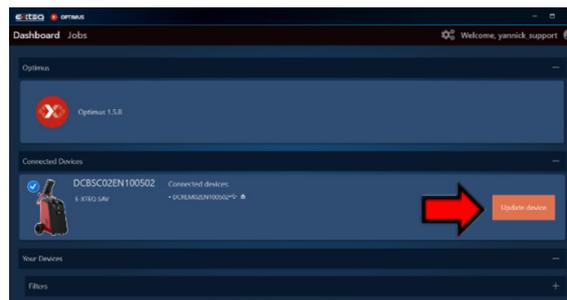

On your dashboard the device will appear. You can make the update by clicking on "Update Device" When clicking on the image of the product you will have access to its own dashboard.

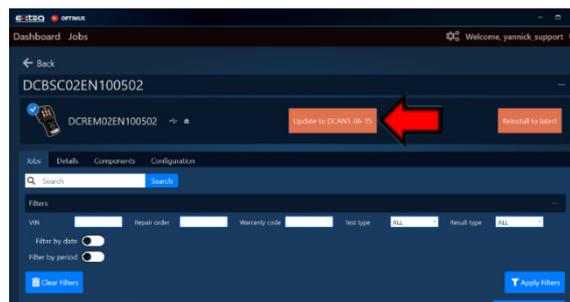

On the device dashboard You can also make the update by clicking on (Update to DCA\*\*\_\*\*\_\*\*).



**Table of Content**

**Introduction**

**Safety Guidelines**

- Maintenance and Storage
- Before Use
- Usage Precautions
- Disassembly/Damage/Removal
- Cleaning the Product

**Getting Started**

- Safety Reminders
- Appearance and Dimensions
- Trolley LED's
- Remote Presentation
- Remote Job Storage

**Accessories**

**Initial Setup**

- Installation
- Battery Cable Clamps Connection
- Power Cable Connection and Power On
- Dealer Id. N°
- Wi-Fi Connection (Remote to Trolley)
- Physical Connection (Remote to Trolley)

**Update**

**Settings**

- Preferences
- Wi-Fi Connection (Remote to network)
- Other Settings

**Diagnostic and Charge**

- Remote handheld diagnostic tester
  - Manual Selection of Battery
  - Start Diagnostic & Results
  - Results (remote CCA test)
- Trolley Diagnostic
  - Pre Delivery Inspection Test (PDI) & Results
  - Complete Diagnostic & Results
  - Charge & Results
  - Load Test & Results
  - Reserve Capacity Test & Results

**History (Results Storage)**

**Optimus**

- Optimus Installation
- Using Optimus


**Support Information**

- Batteries
- Error Messages


**Warranty**

# Initial Setup 7/8

## UPDATE //////////////

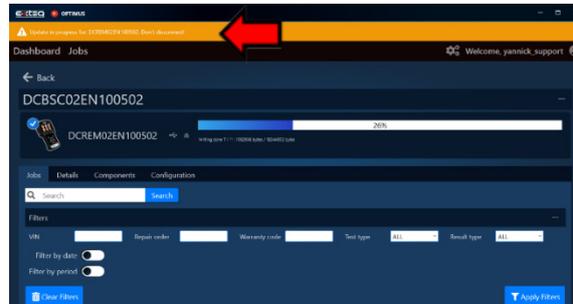


The update will progress and the yellow bar will appear signaling to don't disconnect the device during this step.

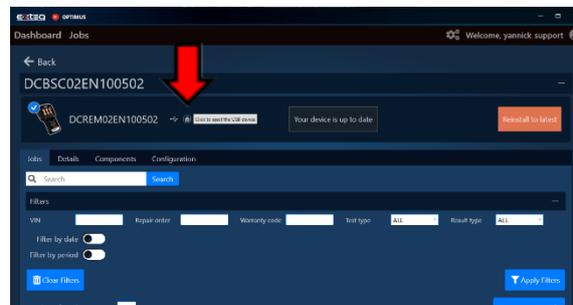


When the update is finished, please click the eject button to be able to get out of the USB connecting mode.

### TROLLEY UPDATE

When connected to the trolley, DCBS Remote might detect that an update is needed for the trolley. The following message will then appear.

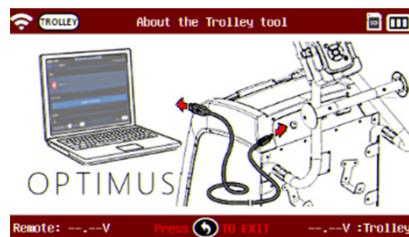

You will need to connect the trolley to your computer to update via USB cable.





**Table of Content**

**Introduction**

**Safety Guidelines**

- Maintenance and Storage
- Before Use
- Usage Precautions
- Disassembly/Damage/Removal
- Cleaning the Product

**Getting Started**

- Safety Reminders
- Appearance and Dimensions
- Trolley LED's
- Remote Presentation
- Remote Job Storage

**Initial Setup**

- Installation
- Battery Cable Clamps Connection
- Power Cable Connection and Power On
- Dealer Id. N°
- Wi-Fi Connection (Remote to Trolley)
- Physical Connection (Remote to Trolley)

**Update**

**Settings**

- Preferences
- Wi-Fi Connection (Remote to network)
- Other Settings

**Diagnostic and Charge**

- Remote handheld diagnostic tester
  - Manual Selection of Battery
  - Start Diagnostic & Results
  - Results (remote CCA test)
- Trolley Diagnostic
  - Pre Delivery Inspection Test (PDI) & Results
  - Complete Diagnostic & Results
  - Charge & Results
  - Load Test & Results
  - Reserve Capacity Test & Results

**History (Results Storage)**

**Optimus**

- Optimus Installation
- Using Optimus

**Support Information**

- Batteries
- Error Messages


**Warranty**

# Initial Setup 8/8


## UPDATE //////////////




On your dashboard the device will appear. You can make the update by clicking on "Update Device" when clicking on the image of the product you will have access to its own dashboard.

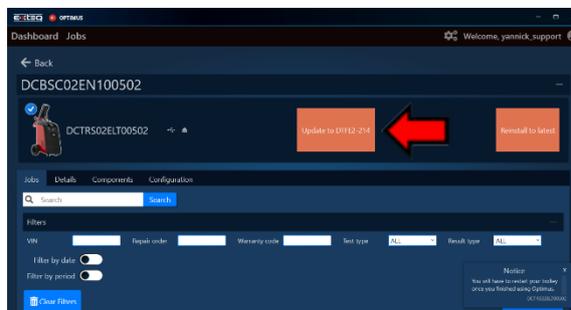

On the device dashboard you can also make the update by clicking on (Update to DTFE\*\_\*\*\*)

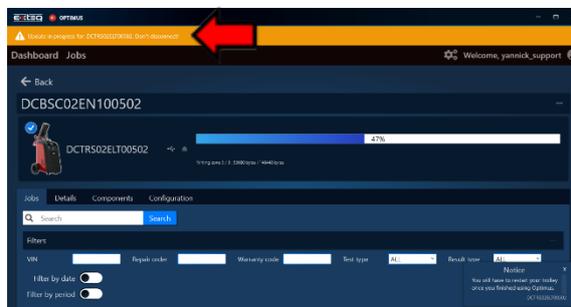

 The update will progress and the yellow bar will appear signaling to don't disconnect the device during this step.

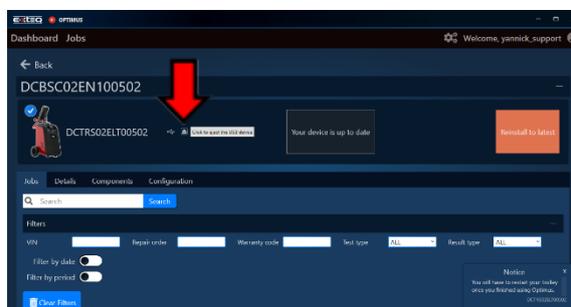

When the update is finished, please click the eject button to be able to get out of the USB connect mode. You will have to restart the trolley once you finished using Optimus.

 **Once the Trolley has updated, please reinitialize the connection with the remote to make sure the update is registered in the remote's memory.**



**Table of Content**

**Introduction**

**Safety Guidelines**

- Maintenance and Storage
- Before Use
- Usage Precautions
- Disassembly/Damage/Removal
- Cleaning the Product

**Getting Started**

- Safety Reminders
- Appearance and Dimensions
- Trolley LED's
- Remote Presentation
- Remote Job Storage

**Accessories**

**Initial Setup**

- Installation
- Battery Cable Clamps Connection
- Power Cable Connection and Power On
- Dealer Id. N°
- Wi-Fi Connection (Remote to Trolley)
- Physical Connection (Remote to Trolley)
- Update

**Settings**

**Preferences**

- Wi-Fi Connection (Remote to network)
- Other Settings

**Diagnostic and Charge**

- Remote handheld diagnostic tester
  - Manual Selection of Battery
  - Start Diagnostic & Results
  - Results (remote CCA test)
- Trolley Diagnostic
  - Pre Delivery Inspection Test (PDI) & Results
  - Complete Diagnostic & Results
  - Charge & Results
  - Load Test & Results
  - Reserve Capacity Test & Results

**History (Results Storage)**

**Optimus**

- Optimus Installation
- Using Optimus

**Support Information**


- Batteries
- Error Messages

**Warranty**

# Settings 1/3

## PREFERENCES //////////////

### Personalize the user experience

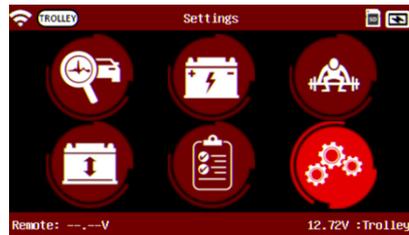


From the Main Menu, the "Settings" icon allows the user to personalize the user experience.

### Languages



From the Settings Menu, choose "Language" and then select your preferred language.

### Units

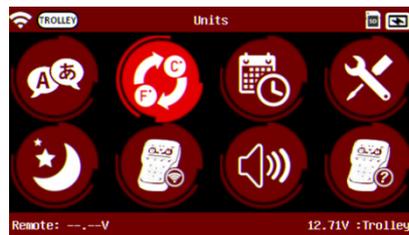

Units can be set up on DCBS. The user has the option to select between Celsius and Fahrenheit.

### Auto Sleep



DCBS Remote is equipped with energy saver mode to reduce power consumption automatically if the device is not used for a certain period of time. The device will power off automatically after 5 minutes if device is not used. It can be disabled or can be set from 1 to 60 minutes.

### Date and Time



Date and Time will be set automatically during and update, however, there is a manual setting of the date and time.

### Wi-Fi Settings



Wi-Fi settings to connect Remote to Trolley or Remote to Network (for job syncing to Argos). Follow respective instructions for this setting.

### Tool Box



"Tool Box" has a Voltmeter and a thermal IR temperature reader.

### Sounds and Haptics



The user has the option to turn the sound and haptics on or off in the settings menu.



**Table of Content**

**Introduction**

**Safety Guidelines**

- Maintenance and Storage
- Before Use
- Usage Precautions
- Disassembly/Damage/Removal
- Cleaning the Product

**Getting Started**

- Safety Reminders
- Appearance and Dimensions
- Trolley LED's
- Remote Presentation
- Remote Job Storage

**Accessories**

**Initial Setup**

- Installation
- Battery Cable Clamps Connection
- Power Cable Connection and Power On Dealer Id. N°
- Wi-Fi Connection (Remote to Trolley)
- Physical Connection (Remote to Trolley)

- Update

**Settings**

Preferences

Wi-Fi Connection (Remote to network)

Other Settings

**Diagnostic and Charge**

- Remote handheld diagnostic tester
- Manual Selection of Battery
- Start Diagnostic & Results
- Results (remote CCA test)

Trolley Diagnostic

- Pre Delivery Inspection Test (PDI) & Results
- Complete Diagnostic & Results
- Charge & Results
- Load Test & Results
- Reserve Capacity Test & Results

**History (Results Storage)**

**Optimus**

- Optimus Installation
- Using Optimus

**Support Information**

- Batteries
- Error Messages

**Warranty**


# Settings 2/3

## WI-FI CONNECTION (REMOTE TO NETWORK) //////////////

 Remote to Network connection is used for syncing the job history to Argos Only. To connect Remote to the Trolley, please follow setup instructions on page 13.




Select the "Net connection" icon.

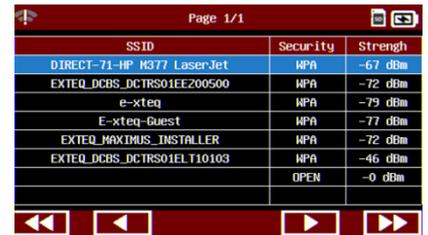

Choose your Wi-Fi network.



Select "Edit" icon for a manual selection.

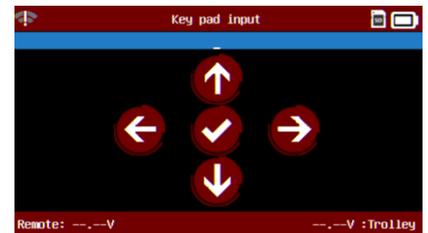

Enter the password using the navigation arrows.



Or select "Barcode Scan" to scan the password. (Barcode of password required)



Select  icon to connect to ARGOS (Cloud Management)



The connection of ARGOS will allow the transfer of jobs without wire connection to PC.



**Table of Content**

**Introduction**

**Safety Guidelines**

- Maintenance and Storage
- Before Use
- Usage Precautions
- Disassembly/Damage/Removal
- Cleaning the Product

**Getting Started**

- Safety Reminders
- Appearance and Dimensions
- Trolley LED's
- Remote Presentation
- Remote Job Storage
- Accessories

**Initial Setup**

- Installation
- Battery Cable Clamps Connection
- Power Cable Connection and Power On
- Dealer Id. N°
- Wi-Fi Connection (Remote to Trolley)
- Physical Connection (Remote to Trolley)
- Update

**Settings**

- Preferences
- Wi-Fi Connection (Remote to network)

**Other Settings**

**Diagnostic and Charge**

- Remote handheld diagnostic tester
  - Manual Selection of Battery
  - Start Diagnostic & Results
  - Results (remote CCA test)
- Trolley Diagnostic
  - Pre Delivery Inspection Test (PDI) & Results
  - Complete Diagnostic & Results
  - Charge & Results
  - Load Test & Results
  - Reserve Capacity Test & Results

**History (Results Storage)**

**Optimus**

- Optimus Installation
- Using Optimus

**Support Information**


- Batteries
- Error Messages

**Warranty**

# Settings 3/3


## OTHER SETTINGS //////////////

### Information

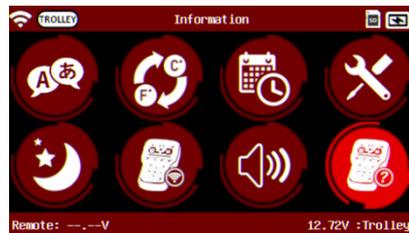

The Information Menu will give access to different extra settings and data about the tool.

### Update

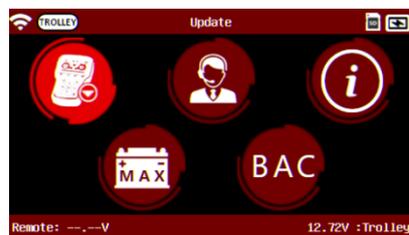

Update icon gives information about how to update the device. Updating application (OPTIMUS) can be downloaded at [www.e-xteq.com](http://www.e-xteq.com)



"Support" icon gives information about how to contact technical support for assistance.

### About




"About" icon gives information regarding the Remote including serial number, software version, and more.

### Dealer ID Number



Select "BAC" (Business Association Code) Icon to enter the Dealer ID number manually or by using the Barcode Scanner.

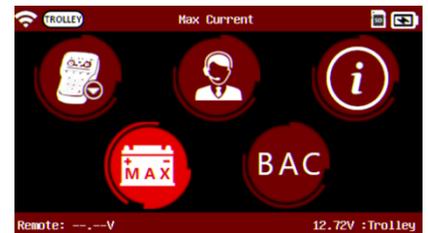

"Max Current" icon gives the possibility to choose between 100A and 80A for maximum charging current. 100A limit for charging current required a 20A Electrical Circuit.



**Table of Content**

**Introduction**

**Safety Guidelines**

- Maintenance and Storage
- Before Use
- Usage Precautions
- Disassembly/Damage/Removal
- Cleaning the Product

**Getting Started**

- Safety Reminders
- Appearance and Dimensions
- Trolley LED's
- Remote Presentation
- Remote Job Storage

**Accessories**

**Initial Setup**

- Installation
- Battery Cable Clamps Connection
- Power Cable Connection and Power On
- Dealer Id. N°
- Wi-Fi Connection (Remote to Trolley)
- Physical Connection (Remote to Trolley)
- Update

**Settings**

- Preferences
- Wi-Fi Connection (Remote to network)
- Other Settings

**Diagnostic and Charge**

- Remote handheld diagnostic tester
  - Manual Selection of Battery
  - Start Diagnostic & Results
  - Results (remote CCA test)
- Trolley Diagnostic
  - Pre Delivery Inspection Test (PDI) & Results
  - Complete Diagnostic & Results
  - Charge & Results
  - Load Test & Results
  - Reserve Capacity Test & Results

**History (Results Storage)**

**Optimus**

- Optimus Installation
- Using Optimus

**Support Information**

- Batteries
- Error Messages

**Warranty**


# Diagnostic and Charge 1/15

## REMOTE HANDHELD DIAGNOSTIC TESTER //////////////////////////////////////////////////////////////////

The Main Menu is the home screen of the tool. It gives access to all the available features of the DCBS remote. Internal Resistance test (CCA Test) is provided by the remote to determine the SOC and the SOH based on the battery voltage (V) and the internal resistance (mOhm).

### Manual Selection of Battery.


Press any key to highlight the "Diagnostic" Icon.  
Press the button on the keypad to go to the next screen.

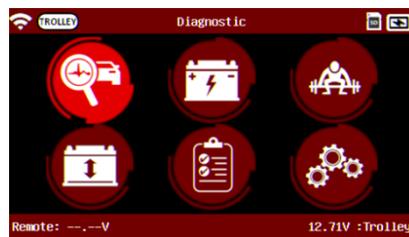


Select "Remote".




Select "Manual".

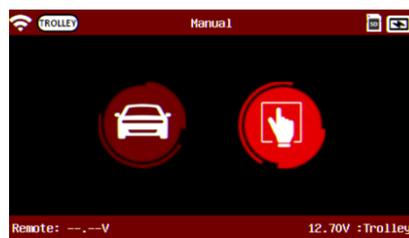

Select the battery type (Chemistry).

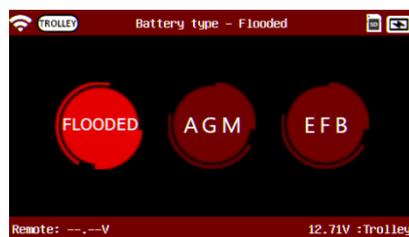


Use the navigation arrows to enter the value indicated on the battery (CCA SAE used in this example)

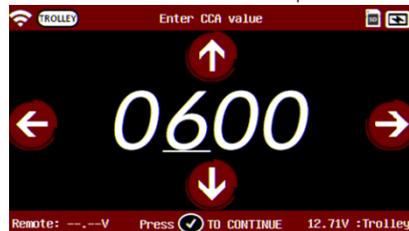

Database selection is not available for E-XTEQ branded unit. Private Branded DCBS units will have Make Model Year selection through a vehicle database.

Select Battery Standard

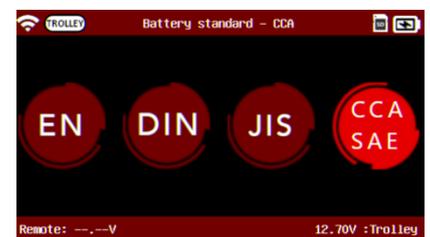



**Table of Content**

**Introduction**

**Safety Guidelines**

- Maintenance and Storage
- Before Use
- Usage Precautions
- Disassembly/Damage/Removal
- Cleaning the Product

**Getting Started**

- Safety Reminders
- Appearance and Dimensions
- Trolley LED's
- Remote Presentation
- Remote Job Storage

**Accessories**

**Initial Setup**

- Installation
- Battery Cable Clamps Connection
- Power Cable Connection and Power On
- Dealer Id. N°
- Wi-Fi Connection (Remote to Trolley)
- Physical Connection (Remote to Trolley)
- Update

**Settings**

- Preferences
- Wi-Fi Connection (Remote to network)
- Other Settings

**Diagnostic and Charge**

- Remote handheld diagnostic tester
  - Manual Selection of Battery
  - Start Diagnostic & Results
  - Results (remote CCA test)
- Trolley Diagnostic
  - Pre Delivery Inspection Test (PDI) & Results
  - Complete Diagnostic & Results
  - Charge & Results
  - Load Test & Results
  - Reserve Capacity Test & Results

**History (Results Storage)**

**Optimus**

- Optimus Installation
- Using Optimus

**Support Information**

- Batteries
- Error Messages

**Warranty**

# Diagnostic and Charge 2/15

## REMOTE HANDHELD DIAGNOSTIC TESTER //////////////////////////////////////////////////////////////////

### Start Diagnostic

Once the characteristics of the battery selected the tool will ask to measure the temperature of the battery.




Do NOT point laser at individuals or reflective objects.

Press the button on the keypad to go to the next screen.




Select battery terminal if these are accessible. (Bare terminals is recommended when doing diagnostic tests)

If the terminals are not accessible, select Jump start post (limits the current injected into chassis to 40A)

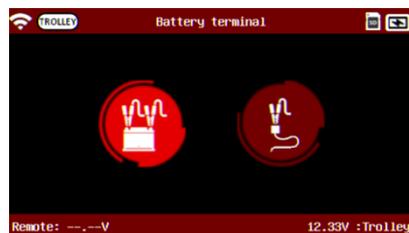

Enter the plate number and VIN of the vehicle. (VIN is mandatory to start and can be scanned or entered manually).

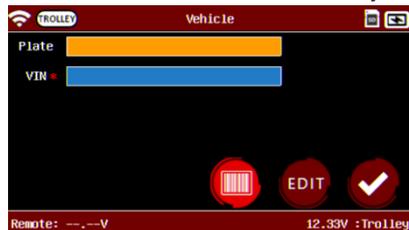

Press the button to start the test.

If the clamps are not connected, the tool will ask to connect the clamps.



The tool will do its calculations and come back with a result.





**Table of Content**

**Introduction**

**Safety Guidelines**

- Maintenance and Storage
- Before Use
- Usage Precautions
- Disassembly/Damage/Removal
- Cleaning the Product

**Getting Started**

- Safety Reminders
- Appearance and Dimensions
- Trolley LED's
- Remote Presentation
- Remote Job Storage
- Accessories

**Initial Setup**

- Installation
- Battery Cable Clamps Connection
- Power Cable Connection and Power On
- Dealer Id. N°
- Wi-Fi Connection (Remote to Trolley)
- Physical Connection (Remote to Trolley)
- Update

**Settings**

- Preferences
- Wi-Fi Connection (Remote to network)
- Other Settings

**Diagnostic and Charge**

- Remote handheld diagnostic tester
  - Manual Selection of Battery
  - Start Diagnostic & Results
  - Results (remote CCA test)
- Trolley Diagnostic
  - Pre Delivery Inspection Test (PDI) & Results
  - Complete Diagnostic & Results
  - Charge & Results
  - Load Test & Results
  - Reserve Capacity Test & Results

**History (Results Storage)**

**Optimus**

- Optimus Installation
- Using Optimus

**Support Information**

- Batteries
- Error Messages

**Warranty**

# Diagnostic and Charge 3/15


## REMOTE HANDHELD DIAGNOSTIC TESTER //////////////////////////////////////////////////////////////////

### Results (Remote CCA Test)


Three different possible screen results:




No Warranty Code will be generated when the test is done with the Remote Only

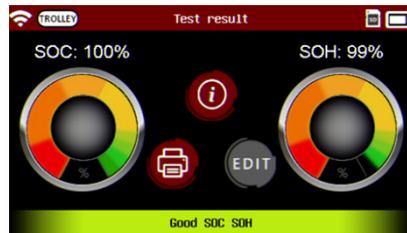

Battery is Good (Satisfactory SOC and SOH)

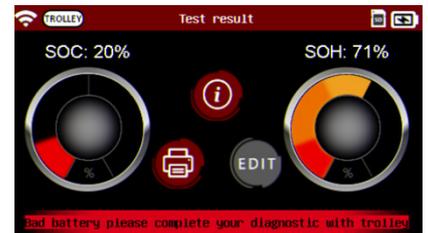

Battery is BAD (unsatisfactory SOH regardless of SOC). A diagnostic with the trolley is advised.

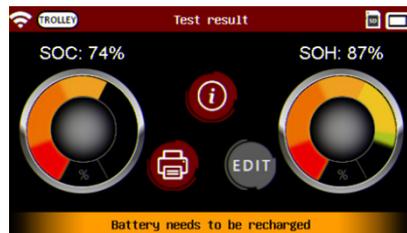

Battery needs to be recharged (Unsatisfactory SOC, good SOH).

After Diagnostic Test has been performed, go to the print icon to print the receipt of the result.

Remote has to be placed in the Docking Station to print.





## Table of Content

### Introduction

#### Safety Guidelines

Maintenance and Storage  
 Before Use  
 Usage Precautions  
 Disassembly/Damage/Removal  
 Cleaning the Product

#### Getting Started

Safety Reminders  
 Appearance and Dimensions  
 Trolley LED's  
 Remote Presentation  
 Remote Job Storage

#### Accessories

#### Initial Setup

Installation  
 Battery Cable Clamps Connection  
 Power Cable Connection and Power On  
 Dealer Id. N°  
 Wi-Fi Connection (Remote to Trolley)  
 Physical Connection (Remote to Trolley)  
 Update

#### Settings

Preferences  
 Wi-Fi Connection (Remote to network)  
 Other Settings

#### Diagnostic and Charge

Remote handheld diagnostic tester  
 -Manual Selection of Battery  
 -Start Diagnostic & Results  
 -Results (remote CCA test)

#### Trolley Diagnostic

-Pre Delivery Inspection Test (PDI) & Results  
 -Complete Diagnostic & Results  
 -Charge & Results  
 -Load Test & Results

-Reserve Capacity Test & Results

#### History (Results Storage)

#### Optimus

-Optimus Installation  
 -Using Optimus

#### Support Information

Batteries  
 Error Messages

#### Warranty

# Diagnostic and Charge 4/15

## TROLLEY DIAGNOSTIC //////////////

### Complete Diagnostic

DCBS Trolley provides a fully automatic process following a Smart Logic test sequence and can generate a warranty code, needed for warranty claims. To start the automatic diagnostic, select Diagnostic from the Main Menu and then select Trolley.

#### Trolley Diagnostic needed for Warranty Claims



The Automatic Diagnostic performed by DCBS includes:

- Internal resistance test (CCA test).** To determine the SOH and SOC based on the battery voltage (V) and internal resistance (mOhm);
- Load test (Half CCA).** Pass / failed test to simulate a cranking based on the voltage (V) evolution depending on time(s);
- **Reserve capacity test.** Pass / failed test based on a load to discharge and check the battery voltage (V) response;
- **Charge acceptance.** Dynamic tests to diagnose if the battery can accept the charge (100A range).

Follow the steps in Manual Battery selection to select the battery information. (See section "Remote Handheld Diagnostic Tester -> Manual Battery Selection" listed above).



*If the remote is not connected to the trolley via Wi-Fi, connection will be attempted automatically. If Physical Connection option is selected, RJ45 cable must be connected to Remote and Trolley at the start of the test.*



**Table of Content**

**Introduction**

**Safety Guidelines**

- Maintenance and Storage
- Before Use
- Usage Precautions
- Disassembly/Damage/Removal
- Cleaning the Product

**Getting Started**

- Safety Reminders
- Appearance and Dimensions
- Trolley LED's
- Remote Presentation
- Remote Job Storage

**Accessories**

**Initial Setup**

- Installation
- Battery Cable Clamps Connection
- Power Cable Connection and Power On
- Dealer Id. N°
- Wi-Fi Connection (Remote to Trolley)
- Physical Connection (Remote to Trolley)
- Update

**Settings**

- Preferences
- Wi-Fi Connection (Remote to network)
- Other Settings

**Diagnostic and Charge**

- Remote handheld diagnostic tester
  - Manual Selection of Battery
  - Start Diagnostic & Results
  - Results (remote CCA test)
- Trolley Diagnostic
  - Pre Delivery Inspection Test (PDI) & Results
  - Complete Diagnostic & Results
  - Charge & Results
  - Load Test & Results
  - Reserve Capacity Test & Results

**History (Results Storage)**

**Optimus**

- Optimus Installation
- Using Optimus

**Support Information**

- Batteries
- Error Messages


**Warranty**

# Diagnostic and Charge 5/15


## TROLLEY DIAGNOSTIC //////////////

After vehicle or battery selection is made and connection to the trolley established, the tool will ask to measure the temperature of the battery.


 **Do NOT point laser at individuals or reflective objects.**

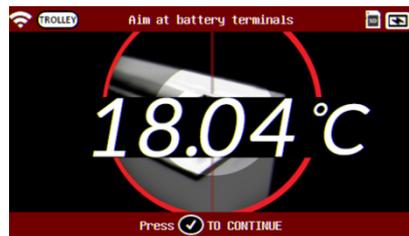


Press the  button on the keypad to go to the next screen.

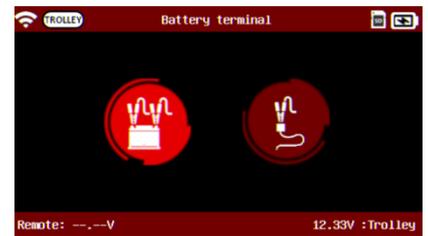

Select battery terminal if they are accessible. (For Diagnostic, it is always recommended to test at bare battery terminals for most accurate results).

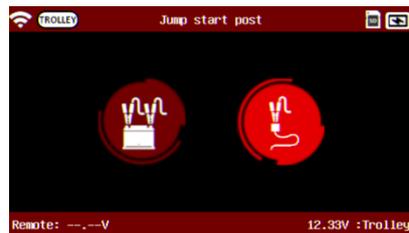

If the terminals are not accessible, select Jump Start Post (limits the current injected into the chassis to 40A).

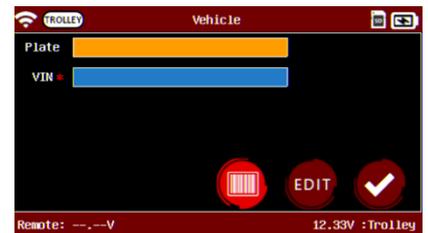

Enter the plate number and the VIN of the vehicle. (the VIN is mandatory to start).



If the clamps are not connected, the tool will ask to connect the clamps.



Remote needs to be on the docking station for Diagnostic to start.



Press the  button to start the Diagnostic test. If everything is connected properly, the tool will perform the test and display the result.



If the battery voltage is too low, the tool will perform a pre-charge on the battery, and then continue with the diagnostic test.



**Table of Content**

**Introduction**

**Safety Guidelines**

- Maintenance and Storage
- Before Use
- Usage Precautions
- Disassembly/Damage/Removal
- Cleaning the Product

**Getting Started**

- Safety Reminders
- Appearance and Dimensions
- Trolley LED's
- Remote Presentation
- Remote Job Storage

**Accessories**

**Initial Setup**

- Installation
- Battery Cable Clamps Connection
- Power Cable Connection and Power On
- Dealer Id. N°
- Wi-Fi Connection (Remote to Trolley)
- Physical Connection (Remote to Trolley)
- Update

**Settings**

- Preferences
- Wi-Fi Connection (Remote to network)
- Other Settings

**Diagnostic and Charge**

- Remote handheld diagnostic tester
  - Manual Selection of Battery
  - Start Diagnostic & Results
  - Results (remote CCA test)
- Trolley Diagnostic
  - Pre Delivery Inspection Test (PDI) & Results
  - Complete Diagnostic & Results
  - Charge & Results
  - Load Test & Results
  - Reserve Capacity Test & Results

**History (Results Storage)**

**Optimus**

- Optimus Installation
- Using Optimus

**Support Information**

- Batteries
- Error Messages


**Warranty**

# Diagnostic and Charge 6/15


## TROLLEY DIAGNOSTIC // // // // //

### Results - (Complete Diagnostic)


Four different possible result screens.

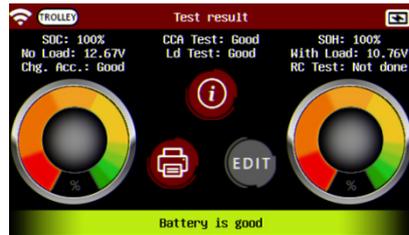


Battery is GOOD (satisfactory SOC and SOH).

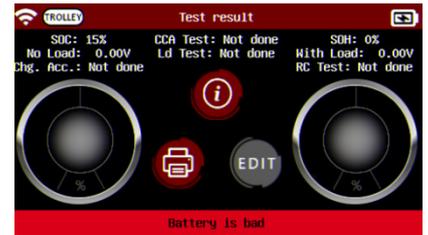

Battery is BAD (unsatisfactory SOH, regardless of SOC).

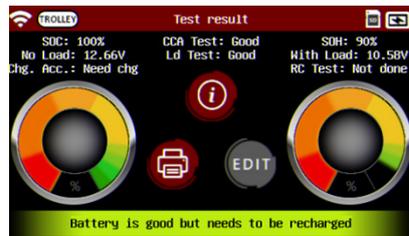


Battery needs to be recharged (Unsatisfactory SOC, Good SOH).

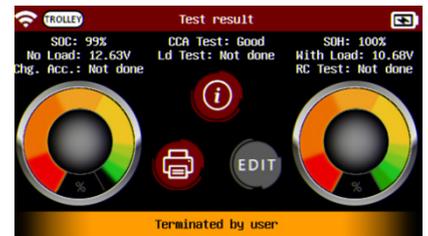

If the test is canceled, the tool will show "Terminated by User".

To generate a warranty code, the tool will ask the user to input the VIN, RO, and Dealer Identification Number (BAC). If no RO is indicated, the default setting will be "NONE".

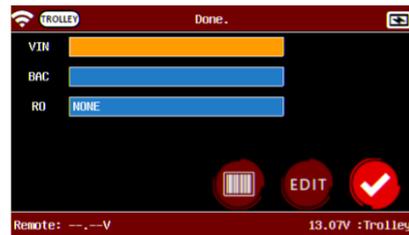

BAC should be pre-filled. VIN will also be pre-filled (requirement to start test).



After Complete Diagnostic has been performed, go to the print icon to print the receipt of the result. Remote has to be replaced in the Docking Station to print.



**Table of Content**

**Introduction**

**Safety Guidelines**

- Maintenance and Storage
- Before Use
- Usage Precautions
- Disassembly/Damage/Removal
- Cleaning the Product

**Getting Started**

- Safety Reminders
- Appearance and Dimensions
- Trolley LED's
- Remote Presentation
- Remote Job Storage
- Accessories

**Initial Setup**

- Installation
- Battery Cable Clamps Connection
- Power Cable Connection and Power On
- Dealer Id. N°
- Wi-Fi Connection (Remote to Trolley)
- Physical Connection (Remote to Trolley)
- Update

**Settings**

- Preferences
- Wi-Fi Connection (Remote to network)
- Other Settings

**Diagnostic and Charge**

- Remote handheld diagnostic tester
  - Manual Selection of Battery
  - Start Diagnostic & Results
  - Results (remote CCA test)
- Trolley Diagnostic
  - Pre Delivery Inspection Test (PDI) & Results
  - Complete Diagnostic & Results
  - Charge & Results
  - Load Test & Results
  - Reserve Capacity Test & Results

**History (Results Storage)**

**Optimus**

- Optimus Installation
- Using Optimus

**Support Information**

- Batteries
- Error Messages

**Warranty**

# Diagnostic and Charge 7/15



## TROLLEY DIAGNOSTIC //////////////////////////////////////////////////////////////////

### Charge

“Charge” Icon will be sued to charge the 12V batteries. Charge acceptance allows to diagnose if and how the battery can accept the charge (100A range). During the dynamic charge, and depending on the battery reaction during the charge, intermediate tests can detect different issues with the battery (Sulfation, etc.).




In the “Charge” Icon, the user has the option to select between “Normal Charge mode” (40A) and “Fast Charge Mode” (80A/100A).

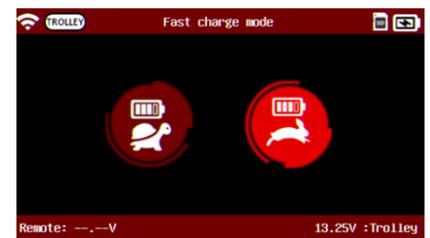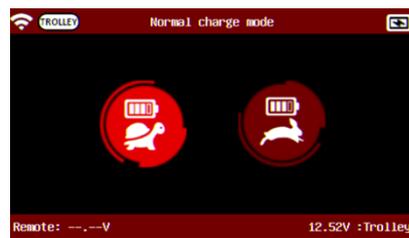

The option to select the battery type will show to select between Flooded, AGM, and EFB batteries.

Then select the battery standard.

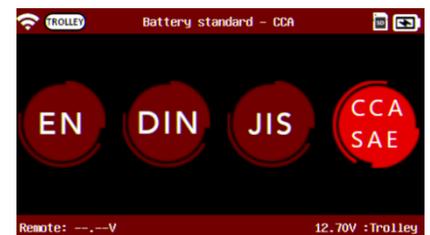

Use the navigation arrows of the keypad to enter the value indicated on the battery (CCA SAE value in this example).





**Table of Content**

**Introduction**

**Safety Guidelines**

- Maintenance and Storage
- Before Use
- Usage Precautions
- Disassembly/Damage/Removal
- Cleaning the Product

**Getting Started**

- Safety Reminders
- Appearance and Dimensions
- Trolley LED's
- Remote Presentation
- Remote Job Storage

**Accessories**

**Initial Setup**

- Installation
- Battery Cable Clamps Connection
- Power Cable Connection and Power On
- Dealer Id. N°
- Wi-Fi Connection (Remote to Trolley)
- Physical Connection (Remote to Trolley)
- Update

**Settings**

- Preferences
- Wi-Fi Connection (Remote to network)
- Other Settings

**Diagnostic and Charge**

- Remote handheld diagnostic tester
  - Manual Selection of Battery
  - Start Diagnostic & Results
  - Results (remote CCA test)
- Trolley Diagnostic
  - Pre Delivery Inspection Test (PDI) & Results
  - Complete Diagnostic & Results
  - Charge & Results
  - Load Test & Results
  - Reserve Capacity Test & Results

**History (Results Storage)**

**Optimus**

- Optimus Installation
- Using Optimus

**Support Information**

- Batteries
- Error Messages

**Warranty**


# Diagnostic and Charge 8/15

## TROLLEY DIAGNOSTIC //////////////


After vehicle or battery selection is made and connection to the trolley established, the tool will ask to measure the temperature of the battery.



Press the [checkmark] button on the keypad to go to the next screen.

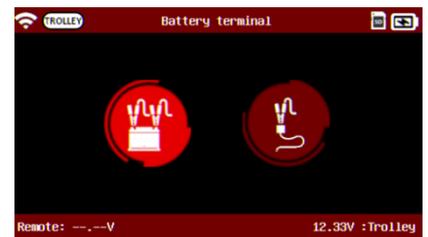

Select battery terminal if they are accessible. (For Diagnostic, it is always recommended to test at bare battery terminals for most accurate results).

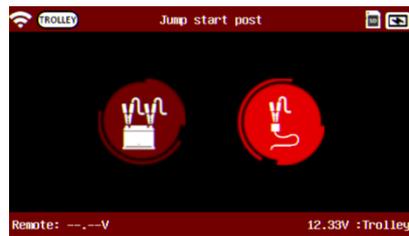

If the terminals are not accessible, select Jump Start Post (limits the current injected into the chassis to 40A).




If the clamps are not connected, the tool will ask to connect the clamps.



Remote needs to be on the docking station for Diagnostic to start.



Press the [play button] button to start the Diagnostic test. If everything is connected properly, the tool will perform the test and display the result.

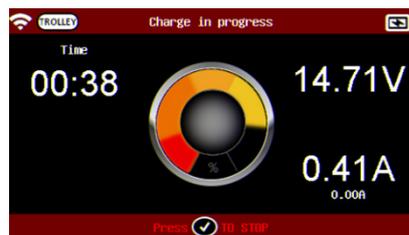

The tool will automatically perform a charge on the selected battery and the Remote will display the charging information.



**Table of Content**

**Introduction**

**Safety Guidelines**

- Maintenance and Storage
- Before Use
- Usage Precautions
- Disassembly/Damage/Removal
- Cleaning the Product

**Getting Started**

- Safety Reminders
- Appearance and Dimensions
- Trolley LED's
- Remote Presentation
- Remote Job Storage

**Accessories**

**Initial Setup**

- Installation
- Battery Cable Clamps Connection
- Power Cable Connection and Power On
- Dealer Id. N°
- Wi-Fi Connection (Remote to Trolley)
- Physical Connection (Remote to Trolley)
- Update

**Settings**

- Preferences
- Wi-Fi Connection (Remote to network)
- Other Settings

**Diagnostic and Charge**

- Remote handheld diagnostic tester
  - Manual Selection of Battery
  - Start Diagnostic & Results
  - Results (remote CCA test)
- Trolley Diagnostic
  - Pre Delivery Inspection Test (PDI) & Results
  - Complete Diagnostic & Results
  - Charge & Results
  - Load Test & Results
  - Reserve Capacity Test & Results

**History (Results Storage)**

**Optimus**

- Optimus Installation
- Using Optimus

**Support Information**


- Batteries
- Error Messages

**Warranty**


# Diagnostic and Charge 9/15

## TROLLEY DIAGNOSTIC //////////////////////////////////////////////////////////////////


### Results - (Charge)

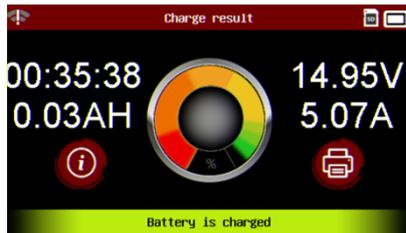

If the charge finishes with no issues, the tool will show "Battery is Charged".

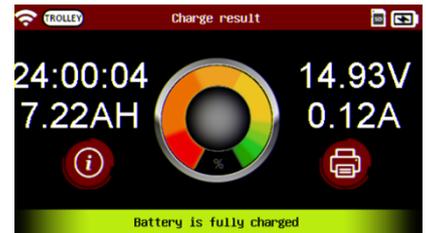


After 24 hours of charge (or<0.2A) with no issues, the Charge result will come back as "Battery is fully Charged".

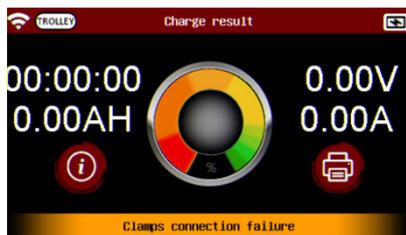


If the clamps are not detecting the battery correctly, the result will come back as "Clamp Connection Failure" and the test must be performed again.



If an issue is found with the battery, the tool will show a battery with an X through it.

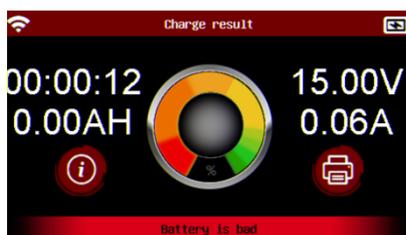

After pressing the ✓ Button, the results will display showing the charge result as "Battery is Bad"

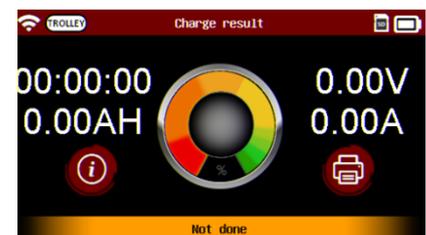

If an issue is found with the battery, the result will display showing the charge result as "Not Done".



**Table of Content**

**Introduction**

**Safety Guidelines**

- Maintenance and Storage
- Before Use
- Usage Precautions
- Disassembly/Damage/Removal
- Cleaning the Product

**Getting Started**

- Safety Reminders
- Appearance and Dimensions
- Trolley LED's
- Remote Presentation
- Remote Job Storage
- Accessories

**Initial Setup**

- Installation
- Battery Cable Clamps Connection
- Power Cable Connection and Power On
- Dealer Id. N°
- Wi-Fi Connection (Remote to Trolley)
- Physical Connection (Remote to Trolley)
- Update

**Settings**

- Preferences
- Wi-Fi Connection (Remote to network)
- Other Settings

**Diagnostic and Charge**

- Remote handheld diagnostic tester
  - Manual Selection of Battery
  - Start Diagnostic & Results
  - Results (remote CCA test)
- Trolley Diagnostic
  - Pre Delivery Inspection Test (PDI) & Results
  - Complete Diagnostic & Results
  - Charge & Results
  - Load Test & Results
  - Reserve Capacity Test & Results

**History (Results Storage)**

**Optimus**

- Optimus Installation
- Using Optimus

**Support Information**

- Batteries
- Error Messages


**Warranty**

# Diagnostic and Charge 10/15

## TROLLEY DIAGNOSTIC // // // // //

### Load Test


Load test is a pass/fail test to simulate a cranking based on the voltage (V) evolution depending on time (s). Load Test Icon will perform a half CCA test on the battery.

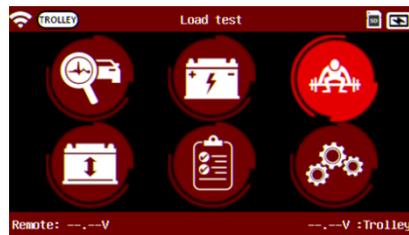


Limited to 900 CCA (818 EN).

The option to select the battery type will show to select between Flooded, AGM, and EFB batteries.

Then select the battery standard.

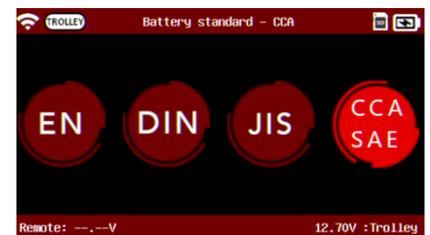

Use the navigation arrows of the keypad to enter the value indicated on the battery (CCA SAE value in this example).

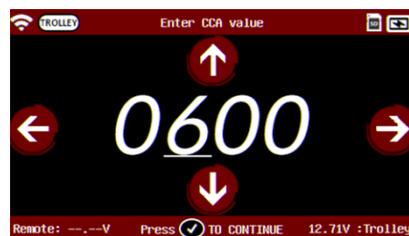

The tool will ask to measure the temperature of the battery.



Do NOT point laser at individuals or reflective objects.



Press the button on the keypad to go to the next screen.



**Table of Content**

**Introduction**

**Safety Guidelines**

- Maintenance and Storage
- Before Use
- Usage Precautions
- Disassembly/Damage/Removal
- Cleaning the Product

**Getting Started**

- Safety Reminders
- Appearance and Dimensions
- Trolley LED's
- Remote Presentation
- Remote Job Storage

**Accessories**

**Initial Setup**

- Installation
- Battery Cable Clamps Connection
- Power Cable Connection and Power On
- Dealer Id. N°
- Wi-Fi Connection (Remote to Trolley)
- Physical Connection (Remote to Trolley)
- Update

**Settings**

- Preferences
- Wi-Fi Connection (Remote to network)
- Other Settings

**Diagnostic and Charge**

- Remote handheld diagnostic tester
  - Manual Selection of Battery
  - Start Diagnostic & Results
  - Results (remote CCA test)
- Trolley Diagnostic
  - Pre Delivery Inspection Test (PDI) & Results
  - Complete Diagnostic & Results
  - Charge & Results
  - Load Test & Results
  - Reserve Capacity Test & Results

**History (Results Storage)**

**Optimus**

- Optimus Installation
- Using Optimus

**Support Information**

- Batteries
- Error Messages

**Warranty**

# Diagnostic and Charge 11/15

## TROLLEY DIAGNOSTIC // // // // //


If the clamps are not connected, the tool will ask to connect the clamps. Remote needs to be on the docking station to Start.




Press the  icon to start the Load Test.



The Load Test can take up to 45 seconds.

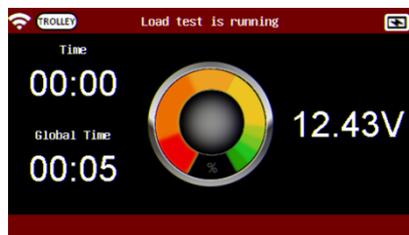

Once the Load Test is done, a graph will display the waveform of the Voltage Drop and Recovery.

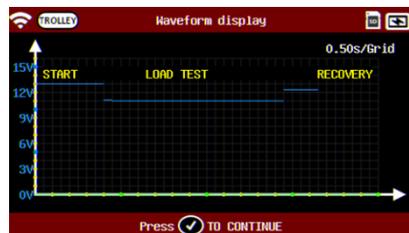



**Table of Content**

**Introduction**

**Safety Guidelines**

- Maintenance and Storage
- Before Use
- Usage Precautions
- Disassembly/Damage/Removal
- Cleaning the Product

**Getting Started**

- Safety Reminders
- Appearance and Dimensions
- Trolley LED's
- Remote Presentation
- Remote Job Storage

**Accessories**

**Initial Setup**

- Installation
- Battery Cable Clamps Connection
- Power Cable Connection and Power On
- Dealer Id. N°
- Wi-Fi Connection (Remote to Trolley)
- Physical Connection (Remote to Trolley)
- Update

**Settings**

- Preferences
- Wi-Fi Connection (Remote to network)
- Other Settings

**Diagnostic and Charge**

- Remote handheld diagnostic tester
  - Manual Selection of Battery
  - Start Diagnostic & Results
  - Results (remote CCA test)
- Trolley Diagnostic
  - Pre Delivery Inspection Test (PDI) & Results
  - Complete Diagnostic & Results
  - Charge & Results
  - Load Test & Results
  - Reserve Capacity Test & Results

**History (Results Storage)**

**Optimus**

- Optimus Installation
- Using Optimus

**Support Information**


- Batteries
- Error Messages

**Warranty**


# Diagnostic and Charge 12/15

## TROLLEY DIAGNOSTIC //////////////


### Results - (Load Test)

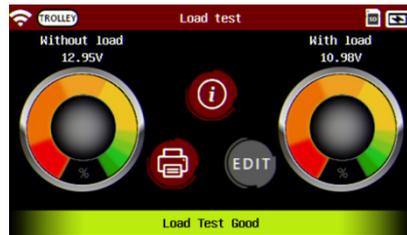

Load Test GOOD (Satisfactory SOC and SOH).

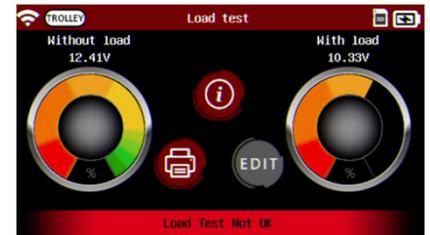

Load Test Not OK (Unsatisfactory SOH, regardless of SOC).

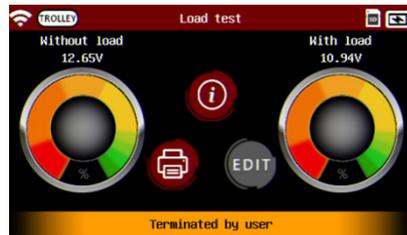

If the test is canceled, the tool will show "Terminated by User".



**Table of Content**

**Introduction**

**Safety Guidelines**

- Maintenance and Storage
- Before Use
- Usage Precautions
- Disassembly/Damage/Removal
- Cleaning the Product

**Getting Started**

- Safety Reminders
- Appearance and Dimensions
- Trolley LED's
- Remote Presentation
- Remote Job Storage
- Accessories

**Initial Setup**

- Installation
- Battery Cable Clamps Connection
- Power Cable Connection and Power On
- Dealer Id. N°
- Wi-Fi Connection (Remote to Trolley)
- Physical Connection (Remote to Trolley)
- Update

**Settings**

- Preferences
- Wi-Fi Connection (Remote to network)
- Other Settings

**Diagnostic and Charge**

- Remote handheld diagnostic tester
  - Manual Selection of Battery
  - Start Diagnostic & Results
  - Results (remote CCA test)
- Trolley Diagnostic
  - Pre Delivery Inspection Test (PDI) & Results
  - Complete Diagnostic & Results
  - Charge & Results
  - Load Test & Results
  - Reserve Capacity Test & Results

**History (Results Storage)**

**Optimus**

- Optimus Installation
- Using Optimus

**Support Information**

- Batteries
- Error Messages


**Warranty**

# Diagnostic and Charge 13/15

## TROLLEY DIAGNOSTIC //////////////////////////////////////////////////////////////////



### Reserve Capacity Test

Reserve Capacity test is a pass/fail test based on a load to discharge and check the battery voltage (V) response.

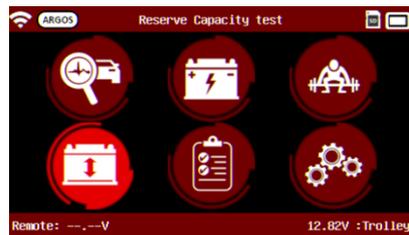

The option to select the battery type will show to select between Flooded, AGM, and EFB batteries.

Then select the battery standard.

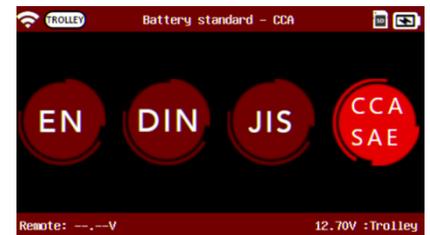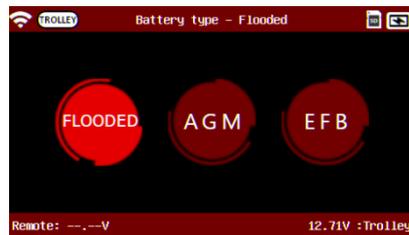

Use the navigation arrows of the keypad to enter the value indicated on the battery (CCA SAE value in this example).



The tool will ask to measure the temperature of the battery.



*Do NOT point laser at individuals or reflective objects.*



Press the [checkmark] button on the keypad to go to the next screen.



**Table of Content**

**Introduction**

**Safety Guidelines**

- Maintenance and Storage
- Before Use
- Usage Precautions
- Disassembly/Damage/Removal
- Cleaning the Product

**Getting Started**

- Safety Reminders
- Appearance and Dimensions
- Trolley LED's
- Remote Presentation
- Remote Job Storage
- Accessories

**Initial Setup**

- Installation
- Battery Cable Clamps Connection
- Power Cable Connection and Power On
- Dealer Id. N°
- Wi-Fi Connection (Remote to Trolley)
- Physical Connection (Remote to Trolley)
- Update

**Settings**

- Preferences
- Wi-Fi Connection (Remote to network)
- Other Settings

**Diagnostic and Charge**

- Remote handheld diagnostic tester
  - Manual Selection of Battery
  - Start Diagnostic & Results
  - Results (remote CCA test)
- Trolley Diagnostic
  - Pre Delivery Inspection Test (PDI) & Results
  - Complete Diagnostic & Results
  - Charge & Results
  - Load Test & Results
  - Reserve Capacity Test & Results

**History (Results Storage)**

**Optimus**

- Optimus Installation
- Using Optimus

**Support Information**

- Batteries
- Error Messages

**Warranty**

# Diagnostic and Charge 14/15

## TROLLEY DIAGNOSTIC //////////////////////////////////////////////////////////////////

If the clamps are not connected, the tool will ask to connect the clamps. Remote needs to be on the docking station to Start.




Press the icon to start the RC Test.



The RC Test can take up to 15 minutes.



Once the RC Test is done, a graph will display the waveform of the Voltage Drop and Amp Hours removed.

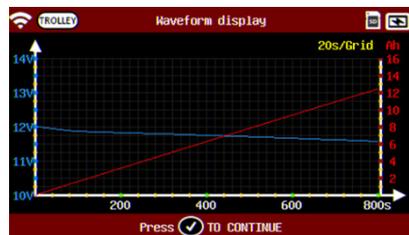



**Table of Content**

**Introduction**

**Safety Guidelines**

- Maintenance and Storage
- Before Use
- Usage Precautions
- Disassembly/Damage/Removal
- Cleaning the Product

**Getting Started**

- Safety Reminders
- Appearance and Dimensions
- Trolley LED's
- Remote Presentation
- Remote Job Storage

**Accessories**

**Initial Setup**

- Installation
- Battery Cable Clamps Connection
- Power Cable Connection and Power On
- Dealer Id. N°
- Wi-Fi Connection (Remote to Trolley)
- Physical Connection (Remote to Trolley)

**Update**

**Settings**

- Preferences
- Wi-Fi Connection (Remote to network)
- Other Settings

**Diagnostic and Charge**

- Remote handheld diagnostic tester
  - Manual Selection of Battery
  - Start Diagnostic & Results
  - Results (remote CCA test)

**Trolley Diagnostic**

- Pre Delivery Inspection Test (PDI) & Results
- Complete Diagnostic & Results
- Charge & Results
- Load Test & Results
- Reserve Capacity Test & Results

**History (Results Storage)**

**Optimus**

- Optimus Installation
- Using Optimus

**Support Information**

- Batteries
- Error Messages

**Warranty**

# Diagnostic and Charge 15/15

## TROLLEY DIAGNOSTIC //////////////////////////////////////////////////////////////////


### Results - (Reserve Capacity Test)



Battery is GOOD (Satisfactory SOC and SOH).



Battery is BAD (Unsatisfactory SOH, regardless of SOC).

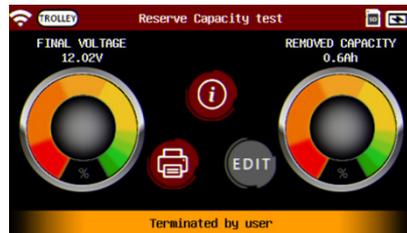

If the test is canceled, the tool will show "Terminated by User".



**Table of Content**

**Introduction**

**Safety Guidelines**

- Maintenance and Storage
- Before Use
- Usage Precautions
- Disassembly/Damage/Removal
- Cleaning the Product

**Getting Started**

- Safety Reminders
  - Appearance and Dimensions
  - Trolley LED's
  - Remote Presentation
  - Remote Job Storage
  - Accessories
- Initial Setup**
- Installation
  - Battery Cable Clamps Connection
  - Power Cable Connection and Power On
  - Dealer Id. N°
  - Wi-Fi Connection (Remote to Trolley)
  - Physical Connection (Remote to Trolley)
  - Update

**Settings**

- Preferences
- Wi-Fi Connection (Remote to network)
- Other Settings

**Diagnostic and Charge**

- Remote handheld diagnostic tester
  - Manual Selection of Battery
  - Start Diagnostic & Results
  - Results (remote CCA test)
- Trolley Diagnostic
  - Pre Delivery Inspection Test (PDI) & Results
  - Complete Diagnostic & Results
  - Charge & Results
  - Load Test & Results
  - Reserve Capacity Test & Results

**History (Results Storage)**

**Optimus**

- Optimus Installation
- Using Optimus

**Support Information**

- Batteries
- Error Messages

**Warranty**

# Results Storage 1/2

## HISTORY //////////

The History Icon in the Main Menu shows the records of previous tests performed with the Trolley and with the Remote.



Go to the "History" icon.



Select "History" icon again.



Pressing the button will show more information regarding the partitest that was done.



There is the option to view the full information, to delete the record, or print the receipt again.



Select the job you are interested in and press the "Detail" icon.



The details will be displayed.



Select the job you are interested in and select the "Print" icon.



The remote must be placed in the docking station in order to print.



**Table of Content**

**Introduction**

**Safety Guidelines**

- Maintenance and Storage
- Before Use
- Usage Precautions
- Disassembly/Damage/Removal
- Cleaning the Product

**Getting Started**

- Safety Reminders
- Appearance and Dimensions
- Trolley LED's
- Remote Presentation
- Remote Job Storage

**Accessories**

**Initial Setup**

- Installation
- Battery Cable Clamps Connection
- Power Cable Connection and Power On Dealer Id. N°
- Wi-Fi Connection (Remote to Trolley)
- Physical Connection (Remote to Trolley)
- Update

**Settings**

- Preferences
- Wi-Fi Connection (Remote to network)
- Other Settings

**Diagnostic and Charge**

- Remote handheld diagnostic tester
  - Manual Selection of Battery
  - Start Diagnostic & Results
  - Results (remote CCA test)
- Trolley Diagnostic
  - Pre Delivery Inspection Test (PDI) & Results
  - Complete Diagnostic & Results
  - Charge & Results
  - Load Test & Results
  - Reserve Capacity Test & Results

**History (Results Storage)**

**Optimus**

- Optimus Installation
- Using Optimus

**Support Information**


- Batteries
- Error Messages

**Warranty**

# Results Storage 2/2

## HISTORY //////////

All jobs can be automatically saved into OPTIMUS PC software via Wi-Fi connection (remote to network).

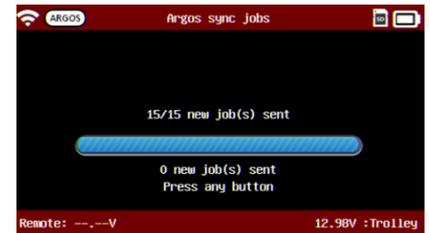

Pressing the  button on the "ARGOS" icon will transfer automatically all job on OPTIMUS PC Software.



If you are not connected to Wi-Fi (Remote to Network), there will be a message displayed. Please follow the steps indicated in the section "Wi-Fi Connection (Remote to Network)" in this manual.



**Table of Content**

**Introduction**

**Safety Guidelines**

- Maintenance and Storage
- Before Use
- Usage Precautions
- Disassembly/Damage/Removal
- Cleaning the Product

**Getting Started**

- Safety Reminders
- Appearance and Dimensions
- Trolley LED's
- Remote Presentation
- Remote Job Storage

**Accessories**

**Initial Setup**

- Installation
- Battery Cable Clamps Connection
- Power Cable Connection and Power On Dealer Id. N°
- Wi-Fi Connection (Remote to Trolley)
- Physical Connection (Remote to Trolley)

**Update**

**Settings**

- Preferences
- Wi-Fi Connection (Remote to network)
- Other Settings

**Diagnostic and Charge**

- Remote handheld diagnostic tester
  - Manual Selection of Battery
  - Start Diagnostic & Results
  - Results (remote CCA test)
- Trolley Diagnostic
  - Pre Delivery Inspection Test (PDI) & Results
  - Complete Diagnostic & Results
  - Charge & Results
  - Load Test & Results
  - Reserve Capacity Test & Results

**History (Results Storage)**

**Optimus**

- Optimus Installation
- Using Optimus

**Support Information**

- Batteries
- Error Messages

**Warranty**

# Optimus 1/5


## OPTIMUS INSTALLATION //////////////

All charging data (jobs) performed by DCBS are stored and can also be uploaded into a dedicated program: OPTIMUS.


When a new software update is released, OPTIMUS will automatically propose to update the DCBS upon connection of its Remote via its dedicated USB cable.  
If the Trolley needs to be updated, when connecting to it, Remote will display the following message "Please update the trolley with Optimus".

To download OPTIMUS, open a web page on the computer and go to the web site:  
<http://e-xteq.com>.

Click on the DOWNLOAD tab

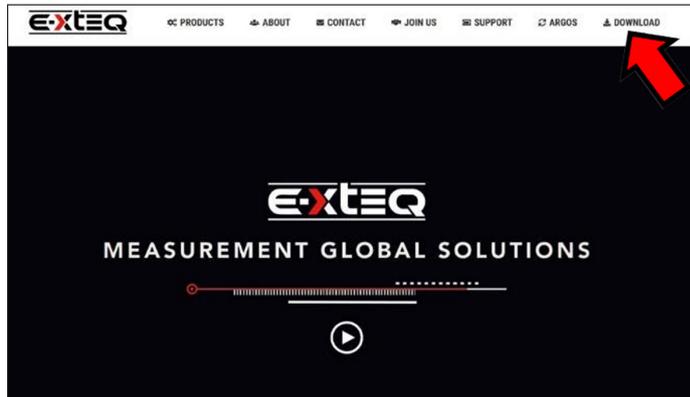

Then click on the "Download OPTIMUS" button.

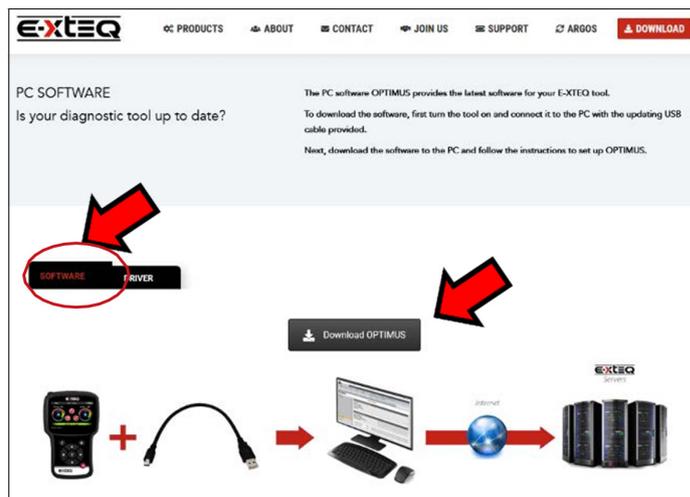



**Table of Content**

**Introduction**

**Safety Guidelines**

- Maintenance and Storage
- Before Use
- Usage Precautions
- Disassembly/Damage/Removal
- Cleaning the Product

**Getting Started**

- Safety Reminders
- Appearance and Dimensions
- Trolley LED's
- Remote Presentation
- Remote Job Storage
- Accessories

**Settings**

- Preferences
- Wi-Fi Connection (Remote to network)
- Other Settings

**Diagnostic and Charge**

- Remote handheld diagnostic tester
  - Manual Selection of Battery
  - Start Diagnostic & Results
  - Results (remote CCA test)
- Trolley Diagnostic
  - Pre Delivery Inspection Test (PDI) & Results
  - Complete Diagnostic & Results
  - Charge & Results
  - Load Test & Results
  - Reserve Capacity Test & Results

**History (Results Storage)**

**Optimus**

- Optimus Installation
- Using Optimus

**Support Information**



- Batteries
- Error Messages

**Warranty**


# Optimus 2/5

## OPTIMUS INSTALLATION //////////////

Open the download is finished, you can save and open the executable file "OptimusSetup.exe".

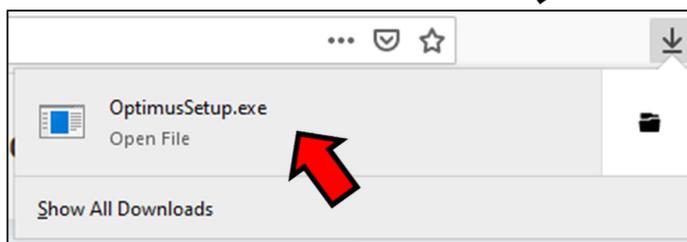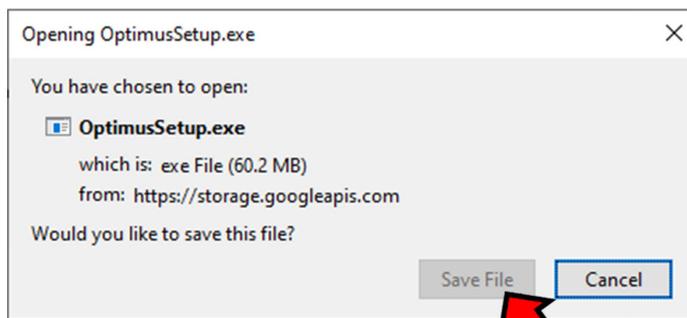

The first time you even open OPTIMUS, you have to create an account. Click on "Don't have an account yet?" link.

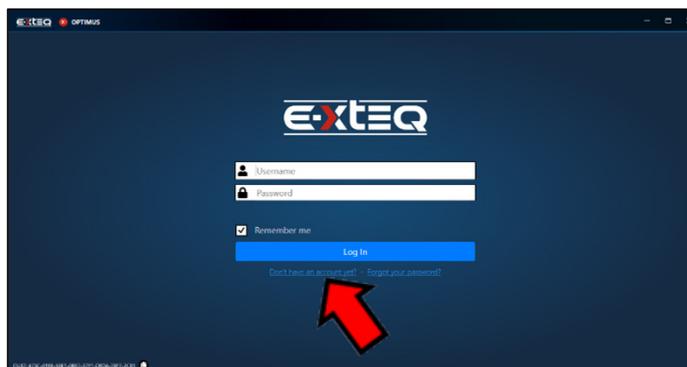



**Table of Content**

**Introduction**

**Safety Guidelines**

- Maintenance and Storage
- Before Use
- Usage Precautions
- Disassembly/Damage/Removal
- Cleaning the Product

**Getting Started**

- Safety Reminders
- Appearance and Dimensions
- Trolley LED's
- Remote Presentation
- Remote Job Storage

**Accessories**

**Initial Setup**

- Installation
- Battery Cable Clamps Connection
- Power Cable Connection and Power On
- Dealer Id. N°
- Wi-Fi Connection (Remote to Trolley)
- Physical Connection (Remote to Trolley)
- Update

**Settings**

- Preferences
- Wi-Fi Connection (Remote to network)
- Other Settings

**Diagnostic and Charge**

- Remote handheld diagnostic tester
  - Manual Selection of Battery
  - Start Diagnostic & Results
  - Results (remote CCA test)
- Trolley Diagnostic
  - Pre Delivery Inspection Test (PDI) & Results
  - Complete Diagnostic & Results
  - Charge & Results
  - Load Test & Results
  - Reserve Capacity Test & Results

**History (Results Storage)**

**Optimus**

- Optimus Installation
- Using Optimus

**Support Information**


- Batteries
- Error Messages

**Warranty**

# Optimus 3/5

## OPTIMUS INSTALLATION //////////////



Fill up all the empty fields, check the "I'm not a robot" box and then click "Register"

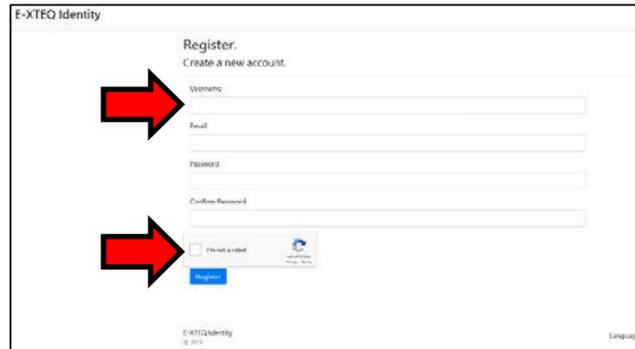

An internet page will open with your settings. Meanwhile, you will receive an email to confirm your email address.



It is very important to confirm your email address by clicking on the link received. (If the link isn't clickable from the mail body, display the email in a web browser.)

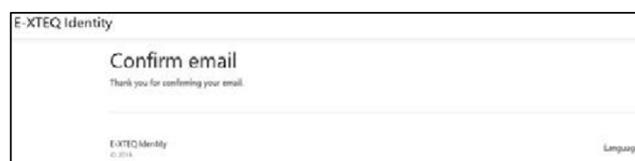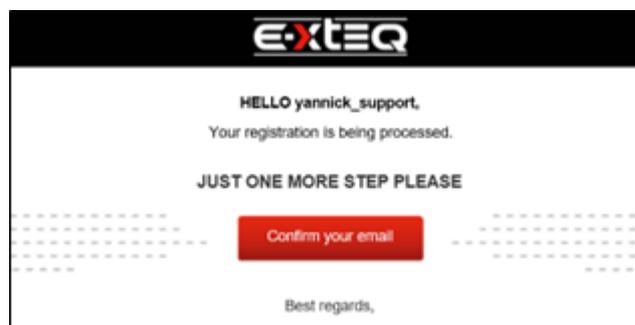



**Table of Content**

**Introduction**

**Safety Guidelines**

- Maintenance and Storage
- Before Use
- Usage Precautions
- Disassembly/Damage/Removal
- Cleaning the Product

**Getting Started**

- Safety Reminders
- Appearance and Dimensions
- Trolley LED's
- Remote Presentation
- Remote Job Storage

**Accessories**

**Initial Setup**

- Installation
- Battery Cable Clamps Connection
- Power Cable Connection and Power On
- Dealer Id. N°
- Wi-Fi Connection (Remote to Trolley)
- Physical Connection (Remote to Trolley)
- Update

**Settings**

- Preferences
- Wi-Fi Connection (Remote to network)
- Other Settings

**Diagnostic and Charge**

- Remote handheld diagnostic tester
  - Manual Selection of Battery
  - Start Diagnostic & Results
  - Results (remote CCA test)
- Trolley Diagnostic
  - Pre Delivery Inspection Test (PDI) & Results
  - Complete Diagnostic & Results
  - Charge & Results
  - Load Test & Results
  - Reserve Capacity Test & Results

**History (Results Storage)**

**Optimus**

- Optimus Installation
- Using Optimus

**Support Information**

- Batteries
- Error Messages

**Warranty**


# Optimus 4/5

## USING OPTIMUS //////////////////////////////////////////////////////////////////




Depending on the configuration of your computer installation, it may be necessary to create an authorization to ARGOS IP Address: 35.204.186.65.

You can now use OPTIMUS, using your credentials.

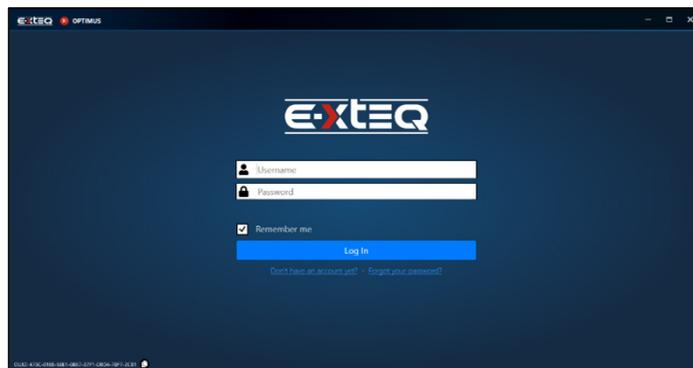


You will then have access to your dashboard.

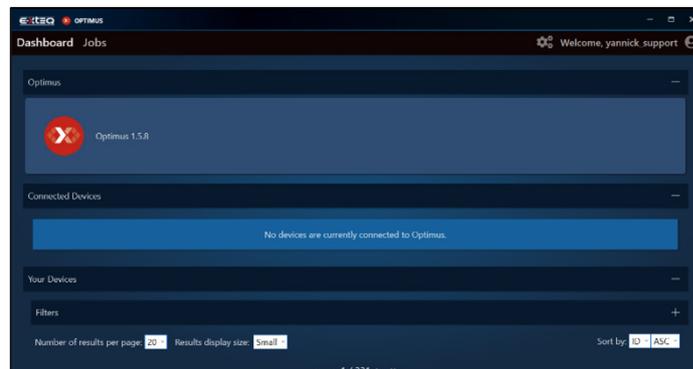

When connecting your tool, it will appear in "Connected Devices". All the recorded job files will be transferred automatically.



Clicking on the image of the product will give you access to the tools Dashboard.

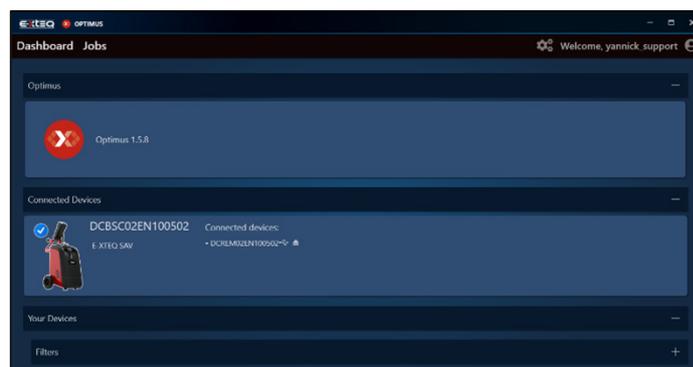



**Table of Content**

**Introduction**

**Safety Guidelines**

- Maintenance and Storage
- Before Use
- Usage Precautions
- Disassembly/Damage/Removal
- Cleaning the Product

**Getting Started**

- Safety Reminders
- Appearance and Dimensions
- Trolley LED's
- Remote Presentation
- Remote Job Storage
- Accessories
- Initial Setup**
- Installation
- Battery Cable Clamps Connection
- Power Cable Connection and Power On
- Dealer Id. N°
- Wi-Fi Connection (Remote to Trolley)
- Physical Connection (Remote to Trolley)
- Update

**Settings**

- Preferences
- Wi-Fi Connection (Remote to network)
- Other Settings

**Diagnostic and Charge**

- Remote handheld diagnostic tester
- Manual Selection of Battery
- Start Diagnostic & Results
- Results (remote CCA test)
- Trolley Diagnostic
- Pre Delivery Inspection Test (PDI) & Results
- Complete Diagnostic & Results
- Charge & Results
- Load Test & Results
- Reserve Capacity Test & Results

**History (Results Storage)**

**Optimus**

- Optimus Installation
- Using Optimus

**Support Information**


- Batteries
- Error Messages

**Warranty**


# Optimus 5/5

## USING OPTIMUS //////////////////////////////////////////////////////////////////


If a new software update is available, this update will be proposed. If the latest version is already installed, "Your device is up to date" will be shown.

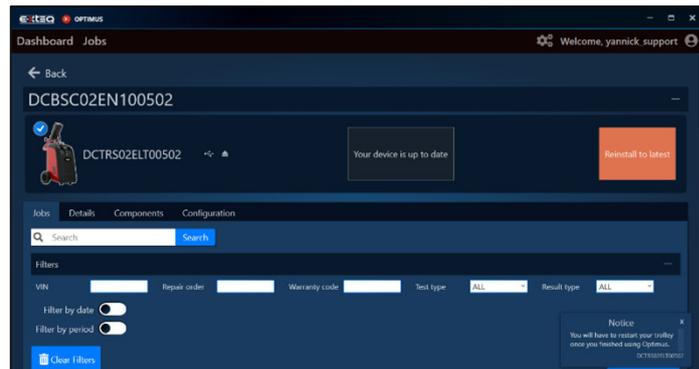

Jobs can be found under the "JOBS" tab. They can be filtered and also exported into a CSV file.

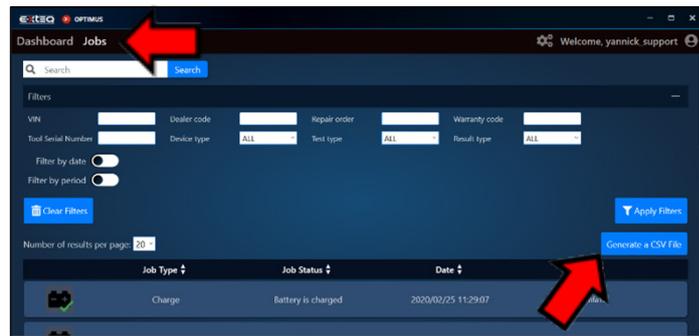

"Apply Filter" will show a list of jobs. Click on the job to see the detail. It is possible to generate and download a PDF file of the job.

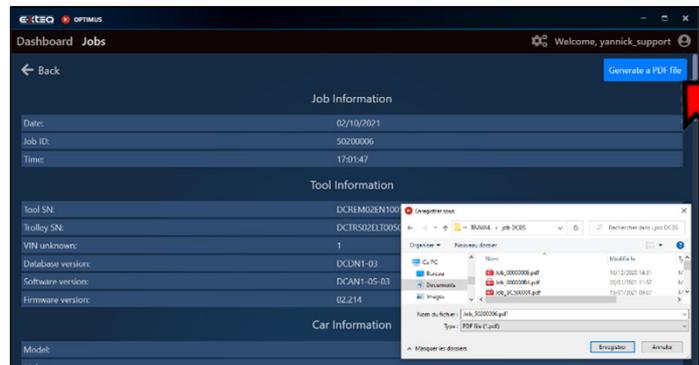

When you want to leave OPTIMUS, please click the eject button to safely eject the USB that is connected from the tool.





**Table of Content**

**Introduction**

**Safety Guidelines**

- Maintenance and Storage
- Before Use
- Usage Precautions
- Disassembly/Damage/Removal
- Cleaning the Product

**Getting Started**

- Safety Reminders
- Appearance and Dimensions
- Trolley LED's
- Remote Presentation
- Remote Job Storage
- Accessories

**Initial Setup**

- Installation
- Battery Cable Clamps Connection
- Power Cable Connection and Power On
- Dealer Id. N°
- Wi-Fi Connection (Remote to Trolley)
- Physical Connection (Remote to Trolley)
- Update

**Settings**

- Preferences
- Wi-Fi Connection (Remote to network)
- Other Settings

**Diagnostic and Charge**

- Remote handheld diagnostic tester
  - Manual Selection of Battery
  - Start Diagnostic & Results
  - Results (remote CCA test)
- Trolley Diagnostic
  - Pre Delivery Inspection Test (PDI) & Results
  - Complete Diagnostic & Results
  - Charge & Results
  - Load Test & Results
  - Reserve Capacity Test & Results

**History (Results Storage)**

**Optimus**

- Optimus Installation
- Using Optimus


**Support Information**

- Batteries
- Error Messages

**Warranty**

# Support Information 1/2

## FROZEN BATTERIES //////////////

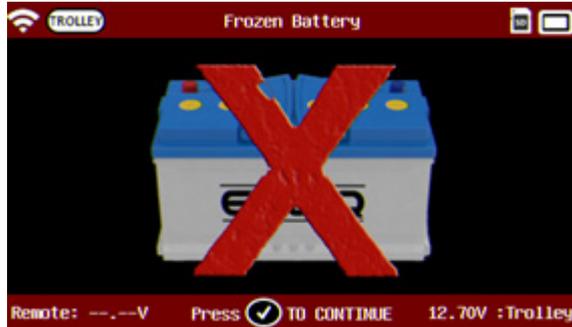

If the battery temperature is too low, (below 32°F / 0°C) the tool will show a battery with an X through it and have an audible chime simultaneously.



Charging a frozen battery is not recommended. Please warm up the battery to room temperature before charging.

## SULFATED BATTERIES //////////////



If sulfation is found on the battery, the tool will show a battery with an X through it and audible chime simultaneously.

## WRONG BATTERIES //////////////



If a wrong value on the battery type is detected, the tool will show a battery with an X through it and have an audible chime simultaneously.



**Table of Content**

**Introduction**

**Safety Guidelines**

- Maintenance and Storage
- Before Use
- Usage Precautions
- Disassembly/Damage/Removal
- Cleaning the Product

**Getting Started**

- Safety Reminders
- Appearance and Dimensions
- Trolley LED's
- Remote Presentation
- Remote Job Storage

**Accessories**

**Initial Setup**

- Installation
- Battery Cable Clamps Connection
- Power Cable Connection and Power On
- Dealer Id. N°
- Wi-Fi Connection (Remote to Trolley)
- Physical Connection (Remote to Trolley)
- Update

**Settings**

- Preferences
- Wi-Fi Connection (Remote to network)
- Other Settings

**Diagnostic and Charge**

- Remote handheld diagnostic tester
  - Manual Selection of Battery
  - Start Diagnostic & Results
  - Results (remote CCA test)
- Trolley Diagnostic
  - Pre Delivery Inspection Test (PDI) & Results
  - Complete Diagnostic & Results
  - Charge & Results
  - Load Test & Results
  - Reserve Capacity Test & Results

**History (Results Storage)**

**Optimus**


- Optimus Installation
- Using Optimus

**Support Information**

- Batteries
- Error Messages**
- Warranty**

# Support Information 2/2

## ERROR MESSAGES //////////////

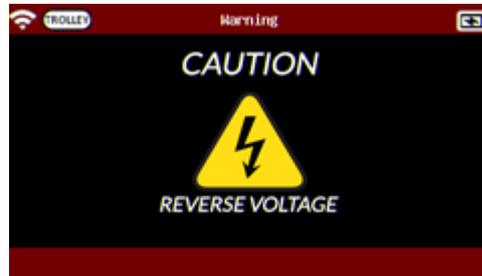

If the battery is connected on the opposite polarity, the screen "Reverse Voltage" will appear.




If an issue is found with the connection of the battery, the screen "Please check clamps connection or directly connect to the battery terminals" will appear.



If the test is interrupted, or the clamps are not detecting the battery correctly, the result will come back as "Clamps connection failure" and the test must be performed again.

## ERROR MESSAGES //////////////

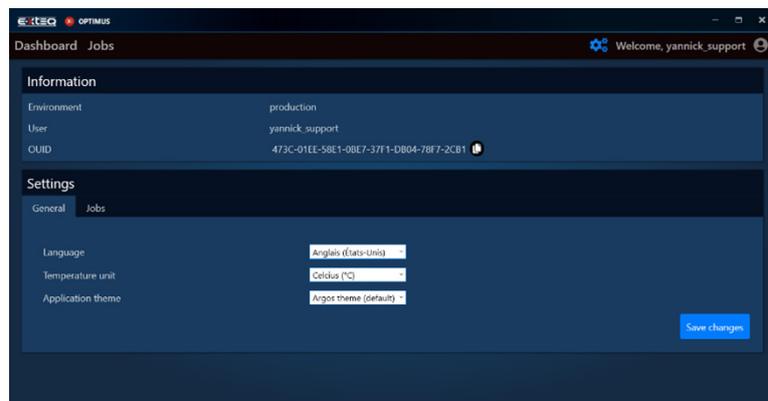

If you have a problem with OPTIMUS requiring support, please note your OUID Number (OPTIMUS/Settings). OUID number will be requested by the customer support service.

## LOCAL SUPPORT //////////////

**North America:**  
 E-XTEQ Technical Support  
 1-877-453-3265  
[support.usa@e-xteq.com](mailto:support.usa@e-xteq.com)  
[www.e-xteq.com](http://www.e-xteq.com)

**Table of Content****Introduction****Safety Guidelines**

Maintenance and Storage

Before Use

Usage Precautions

Disassembly/Damage/Removal

Cleaning the Product

**Getting Started**

Safety Reminders

Appearance and Dimensions

Trolley LED's

Remote Presentation

Remote Job Storage

Accessories

**Initial Setup**

Installation

Battery Cable Clamps Connection

Power Cable Connection and Power On

Dealer Id. N°

Wi-Fi Connection (Remote to Trolley)

Physical Connection (Remote to Trolley)

Update

**Settings**

Preferences

Wi-Fi Connection (Remote to network)

Other Settings

**Diagnostic and Charge**

Remote handheld diagnostic tester

*-Manual Selection of Battery**-Start Diagnostic & Results**-Results (remote CCA test)*

Trolley Diagnostic

*-Pre Delivery Inspection Test (PDI) & Results**-Complete Diagnostic & Results**-Charge & Results**-Load Test & Results**-Reserve Capacity Test & Results***History (Results Storage)****Optimus***-Optimus Installation**-Using Optimus***Support Information**

Batteries

Error Messages

**Warranty**

# Warranty

**LIMITED WARRANTY //////////////**

The DCBS product is backed by a Limited 2-Year Warranty. The warranty covers manufacturer defects and workmanship. The warranty excludes misuse or abuse and normal wear and tear.

All accessories are backed by 1-Year Warranty for manufacturer defects only.

All accessories with a 1-Year Warranty are listed below. Please read "How to obtain warranty" instructions in order to receive the correct parts and prevent any charges.

**ACCESSORIES:**

AC Power Cord  
Charge Cable with Clamps Remote Clamps  
Printer  
USB Cable

**HOW TO OBTAIN WARRANTY //////////////**

Before sending a unit back for repair, an RMA (Return Materials Authorization) number must be obtained by contacting E-XTEQ Technical Support

**North America:**  
E-XTEQ Technical Support  
**1-877-453-3265**  
[support.usa@e-xteq.com](mailto:support.usa@e-xteq.com)  
[www.e-xteq.com](http://www.e-xteq.com)

E-XTEQ will ascertain if the unit needs to come in for repair or replacement. If the unit has to be replaced, E-XTEQ will provide full instructions in order for the end user to receive the replacement parts in the shortest delay.



*Detroit, Paris, Yokohama, Shanghai, T aiwan & Queretaro.*

[www.e-xteq.com](http://www.e-xteq.com)